

# A Sightseeing Tour of mm Interferometry

Jérôme PETY  
(IRAM & Obs. de Paris)

8<sup>th</sup> IRAM Millimeter Interferometry School  
Oct. 15 - Oct. 19 2012, Grenoble

# Towards Higher Resolution:

## I. Problem

Telescope resolution:

- $\sim \lambda/D$ ;
- IRAM-30m:  $\sim 11''$  @ 1 mm.


Needs to:

- increase  $D$ ;
  - increase precision of telescope positioning;
  - keep high surface accuracy.
- ⇒ Technically difficult (perhaps impossible?).

## Towards Higher Resolution: II. Solution

Aperture Synthesis: Replacing a single large telescope by a collection of small telescope “filling” the large one.  
⇒ Technically difficult but **feasible**.

ALMA

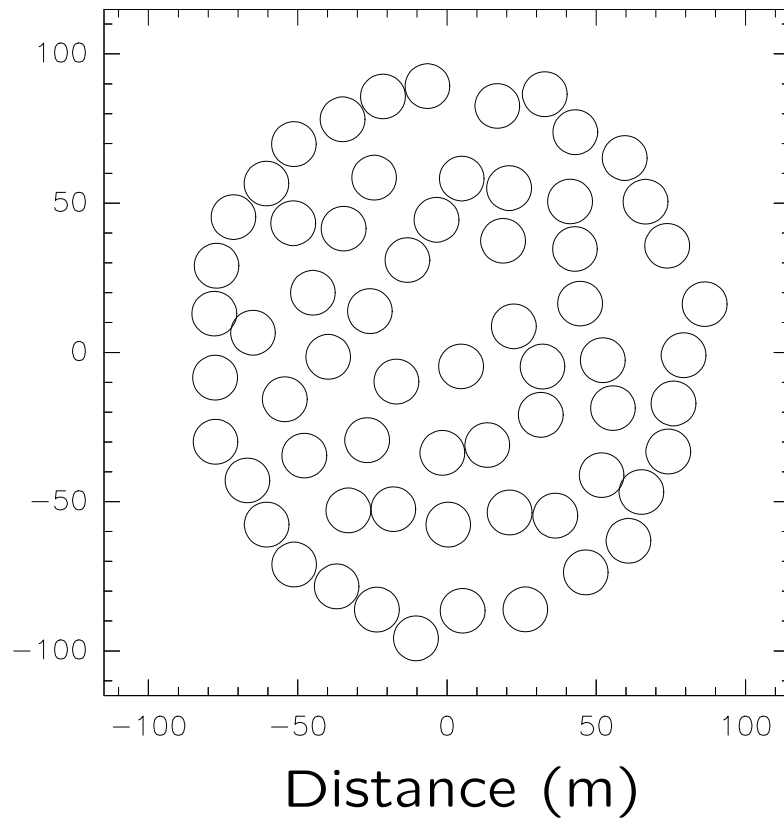

Vocabulary and notations:

**Baseline** Line segment between two antenna.

$b_{ij}$  Baseline length between antenna  $i$  and  $j$ .


**Configuration** Antenna layout (e.g. compact configuration).

$D$  configuration size (e.g. 150 m).

**Primary beam** resolution of one antenna (e.g.  $27''$  @ 1 mm).

**Synthesized beam** resolution of the array (e.g.  $2''$  @ 1 mm).

# Parenthesis: PSF = Diffraction Pattern = Beam Pattern

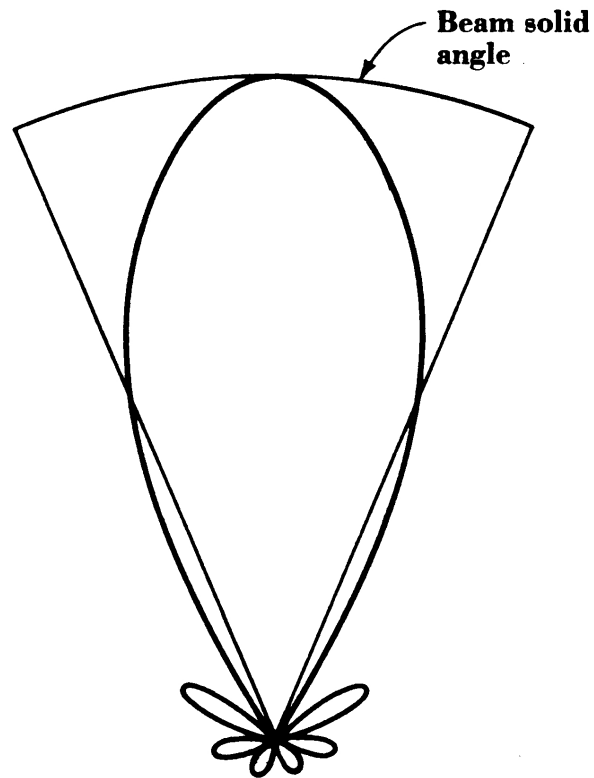

Single-Dish sensitivity  
in polar coordinates.

Combination of:

- Antenna properties;
- Optical system (*i.e.* how the waves are feeding the receiver).


Typical kind:

**Optic/IR** Airy function;  
**Radio** Gaussian function.

(Lecture by P. Hily-Blant)


# Young's Experiment

## Setup

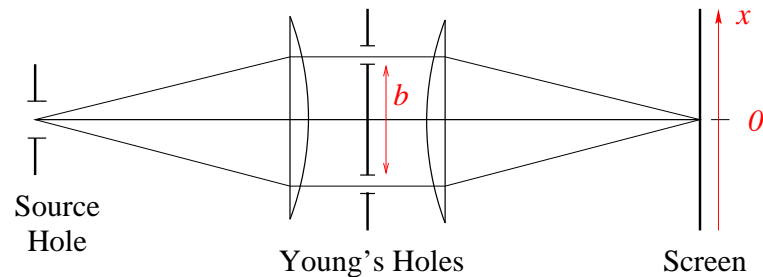

Lens  $\Rightarrow$  Fraunhofer conditions  
(i.e. Plane waves as if the source were placed at infinity).

Obtained image of interference: fringes

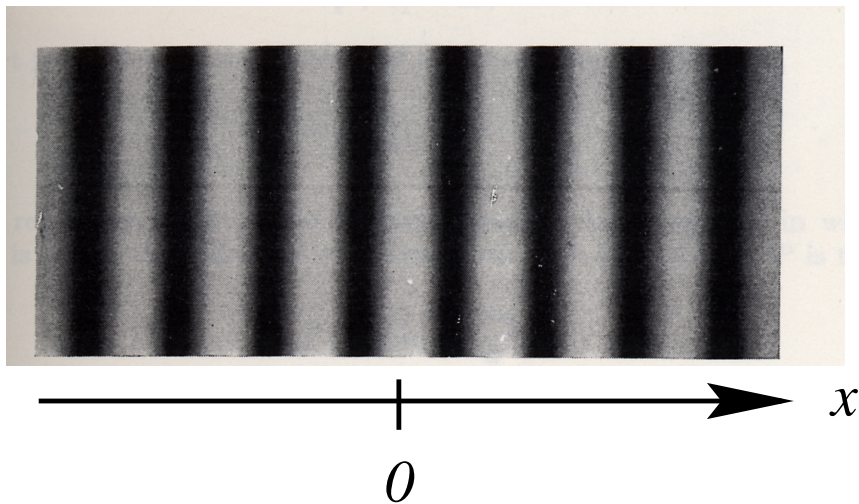


$$I(x) = I_1 + I_2 + 2\sqrt{I_1 I_2} \cos\left(\frac{bx}{\lambda}\right)$$

with

- $\lambda$  Source wavelength;
- $b$  Distance between the two Young's holes;
- $x$  Distance from the optical center on the screen.

# Effect of the Antenna Diffraction Pattern

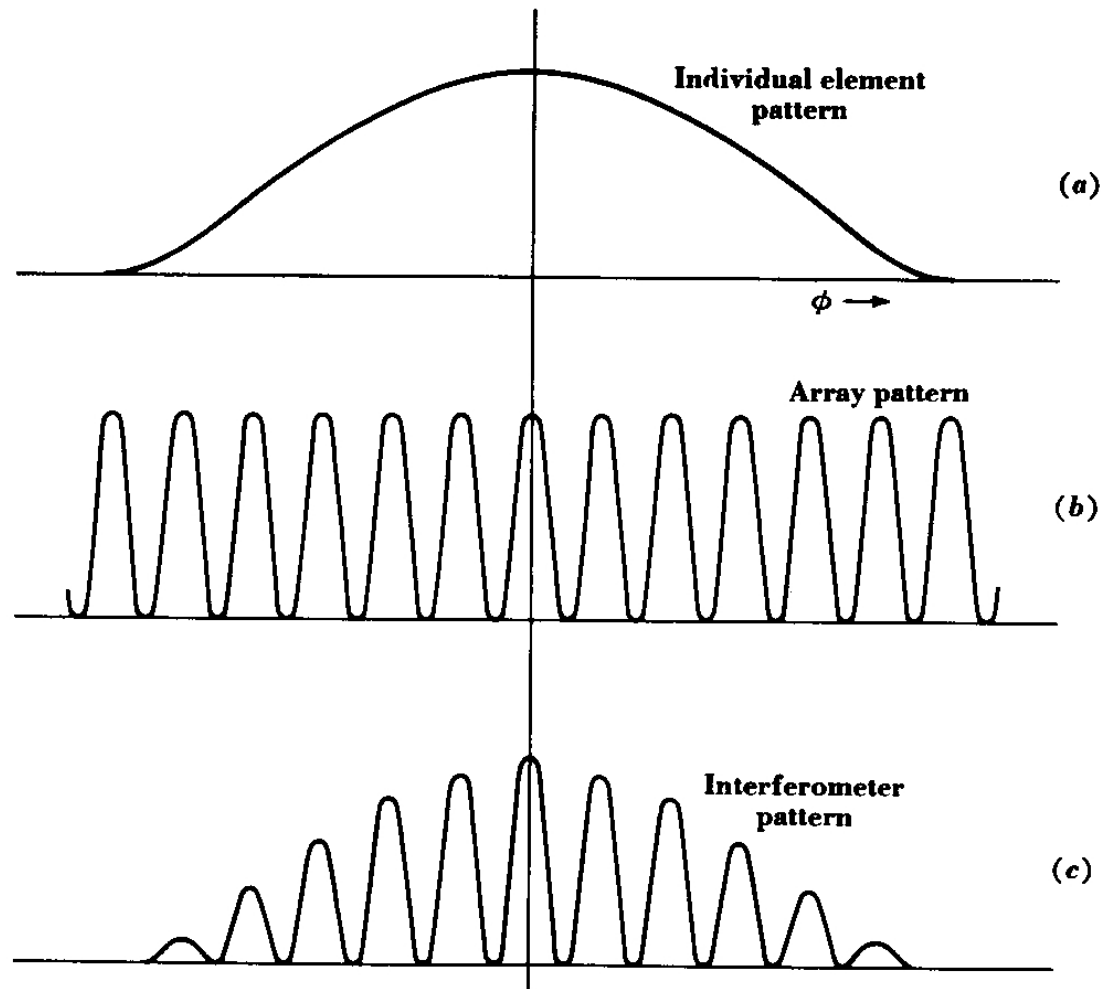


$$I(x) = B(x) \cdot \left\{ I_1 + I_2 + 2\sqrt{I_1 I_2} \cos\left(\frac{bx}{\lambda}\right) \right\}$$

# Effect of the Source Hole Size: I. Description


Hypothesis: Monochromatic source (but not a laser).

Description:

- The Source Hole Size is increased.
- Everything else is kept equal.

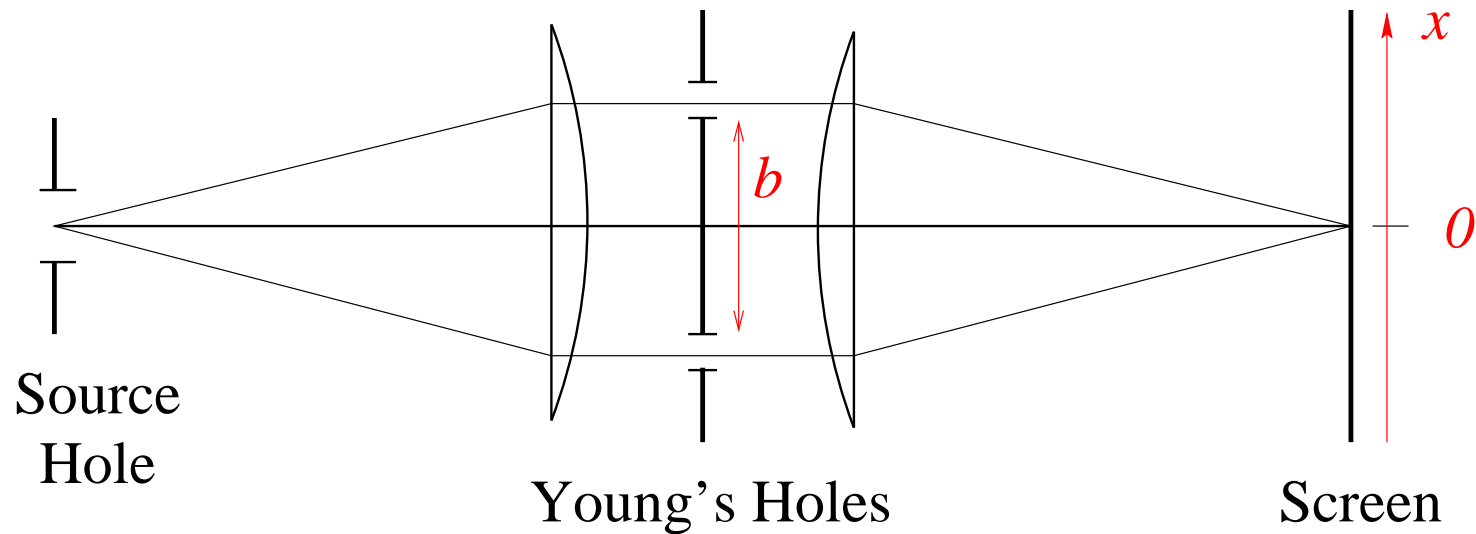

## Effect of the Source Hole Size: II. Results

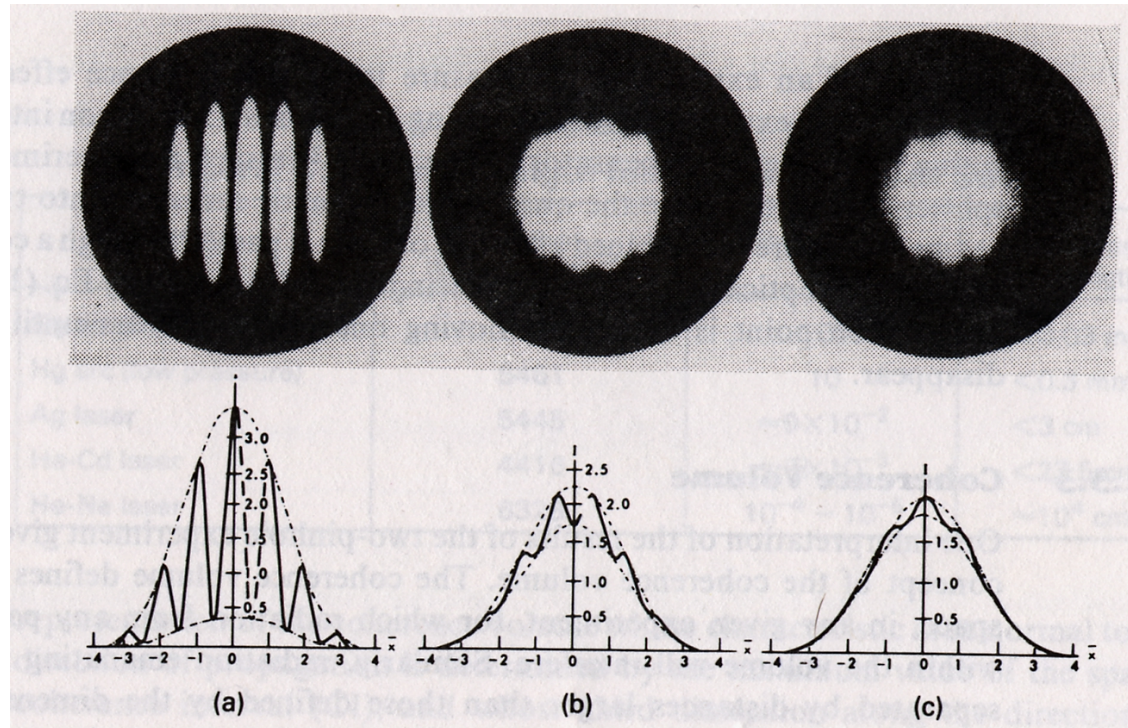

Fringes disappear!  $\Rightarrow$   $\left\{ \begin{array}{l} \text{Fringe contrast is linked to the} \\ \text{spatial properties of the source.} \end{array} \right.$

$$I(x) = I_1 + I_2 + 2\sqrt{I_1 I_2} |C| \cos\left(\frac{bx}{\lambda} + \phi_C\right) \text{ with } |C| = \frac{I_{\max} - I_{\min}}{I_{\max} + I_{\min}}$$




# Effect of the Distance Between Young's Holes: I. Description

Hypothesis:




- Monochromatic source (but not a laser).
- The source hole is a circular disk.

Description:

- The distance between the two Young's holes is increased.
- Everything else is kept equal (in particular the hole size).





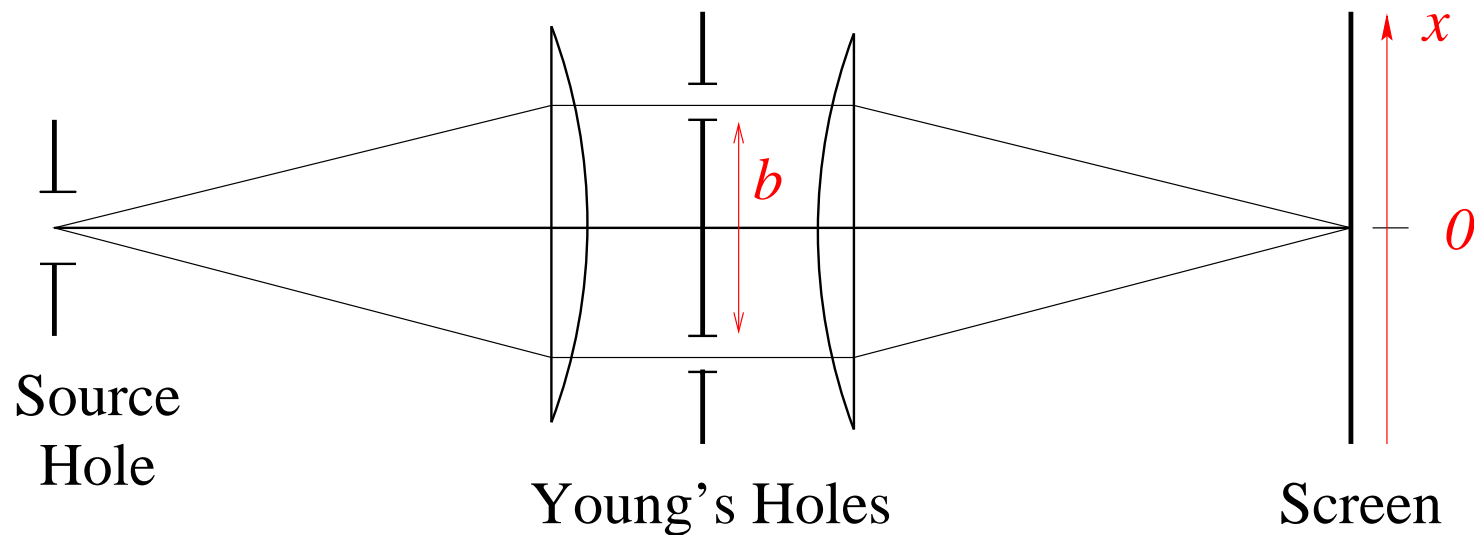


# Effect of the Distance Between Young's Holes: II. Results

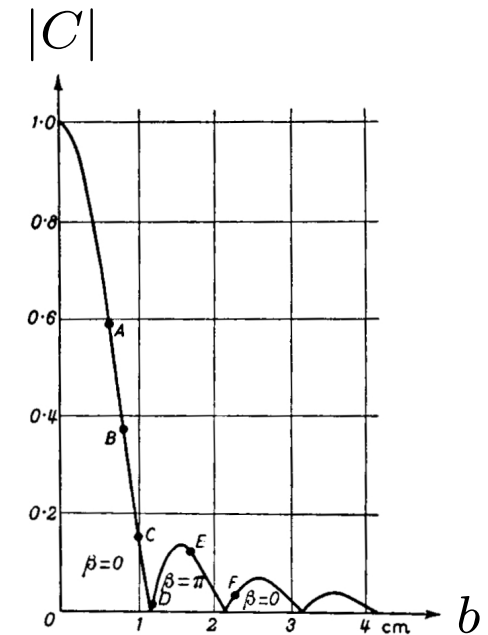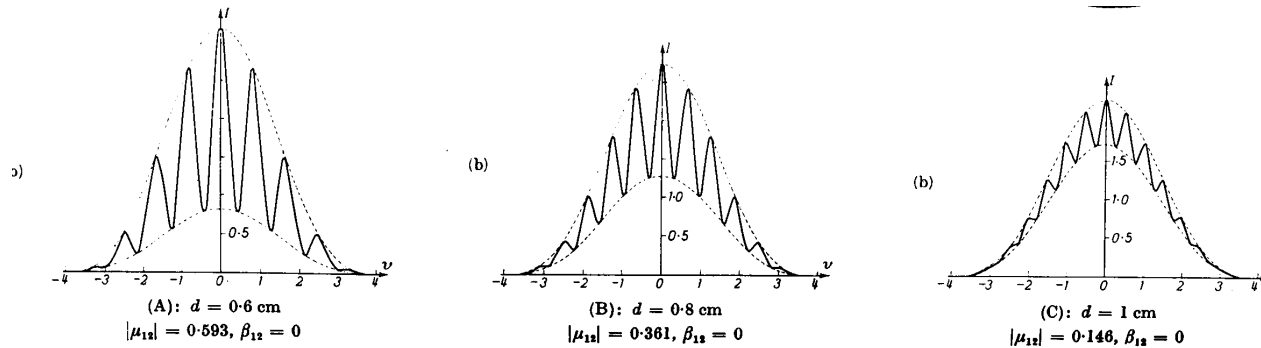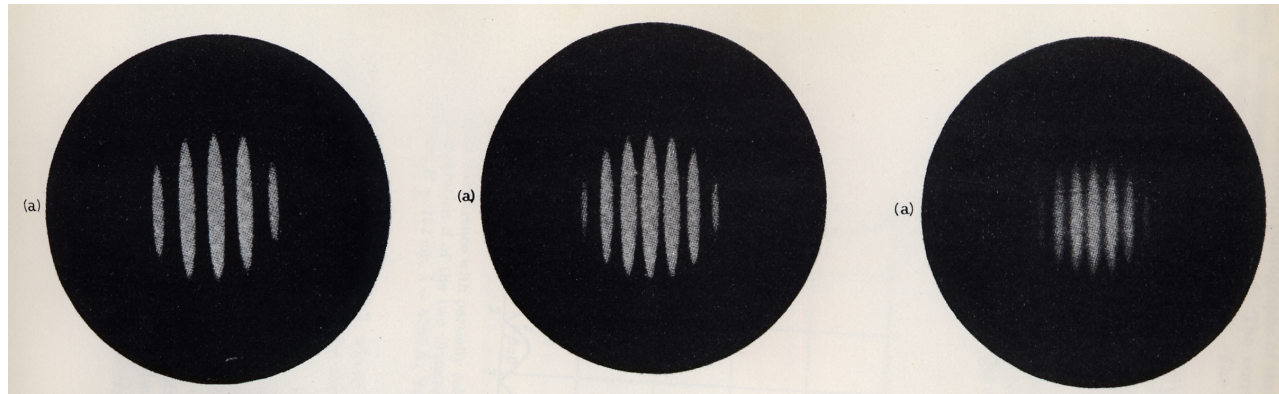


$$I(x) = I_1 + I_2 + 2\sqrt{I_1 I_2} |C| \cos\left(\frac{bx}{\lambda} + \phi_C\right) \text{ with } |C| = \frac{I_{\max} - I_{\min}}{I_{\max} + I_{\min}}$$

# Effect of the Distance Between Young's Holes: II. Results (Continued)

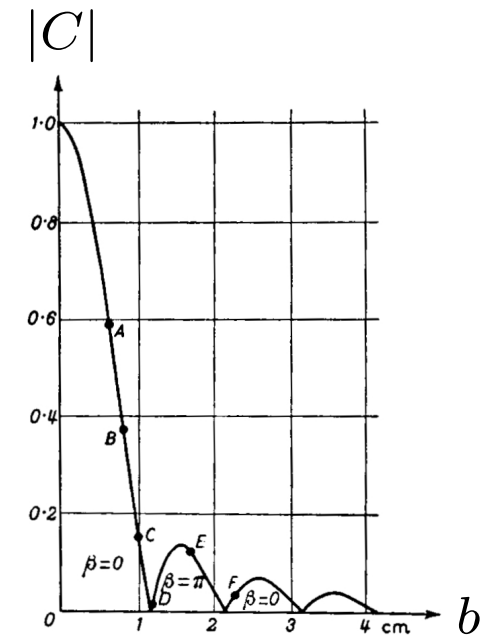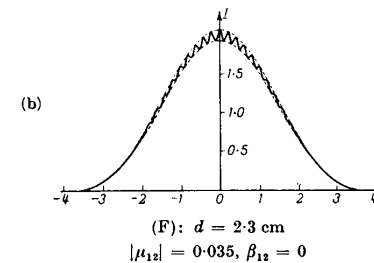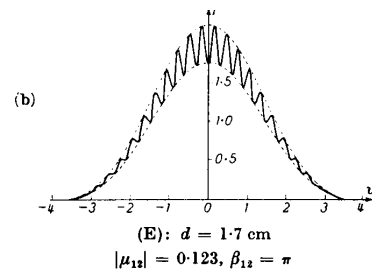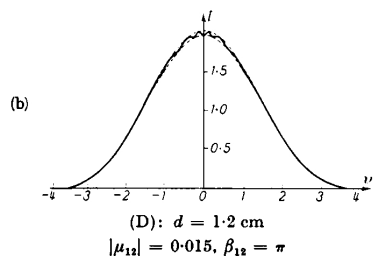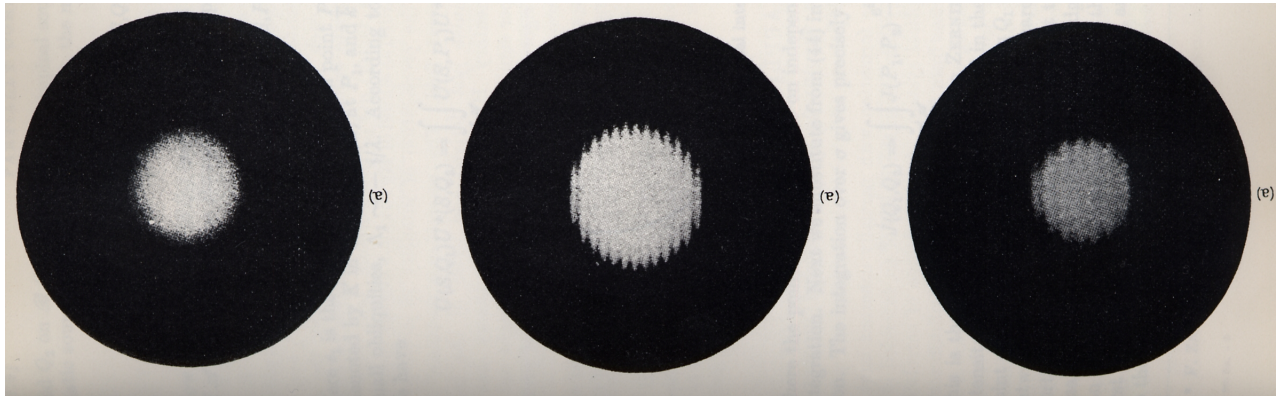


$$I(x) = I_1 + I_2 + 2\sqrt{I_1 I_2} |C| \cos\left(\frac{bx}{\lambda} + \phi_C\right) \quad \text{with} \quad |C| = \frac{I_{\max} - I_{\min}}{I_{\max} + I_{\min}}$$

# Measured Curve = 2D Fourier Transform of the Source

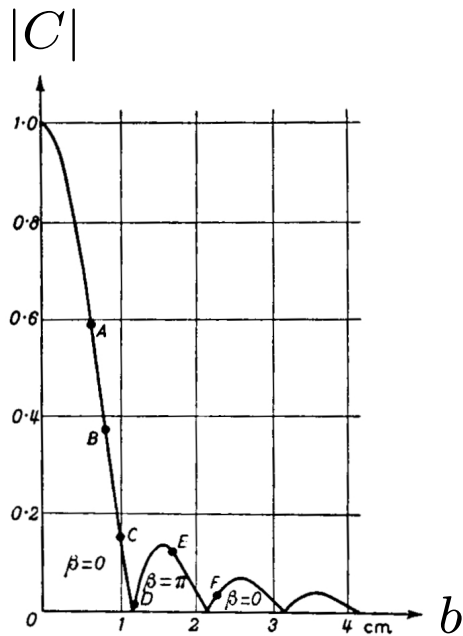

$$\frac{J_1(b)}{b} \stackrel{2D \text{ FT}}{\Leftrightarrow} \text{Heaviside}(\theta)$$

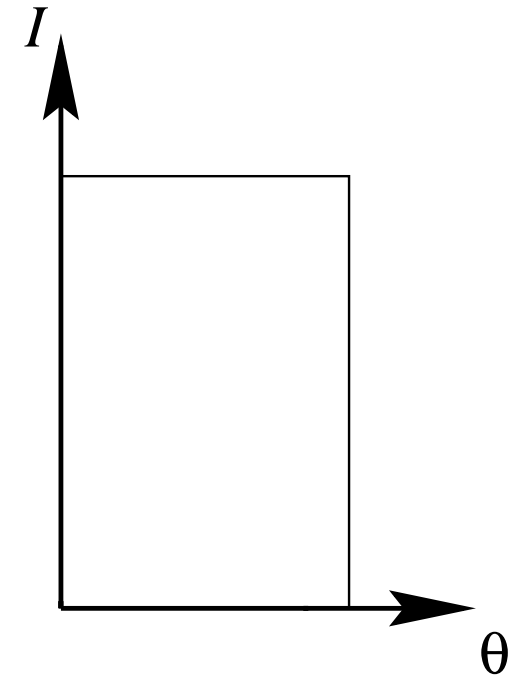

Source = Uniformly illuminated disk.

# Theoretical Basis of the Aperture Synthesis

The van Citter-Zernike theorem


$$V_{ij}(b_{ij}) = C_{ij}(b_{ij}) \cdot I_{\text{tot}} \stackrel{\text{2D FT}}{\Leftrightarrow} B_{\text{primary}} \cdot I_{\text{source}}$$

- Young's holes = Telescopes;
  - Signal received by telescopes are combined by pairs;
  - Fringe visibilities are measured.
- ⇒ One Fourier component of the source (*i.e.* one visibility) is measured by baseline (or antenna pair).
- ⇒ Each baseline length  $b_{ij}$  = a spatial frequency.
  - ⇒ Convention: Spatial frequencies are measured in meter.


## An Example: The PdBI

Number of baselines:  $N(N - 1) = 30$  for  $N = 6$  antennas.

Convention: Fourier plane =  $uv$  plane.

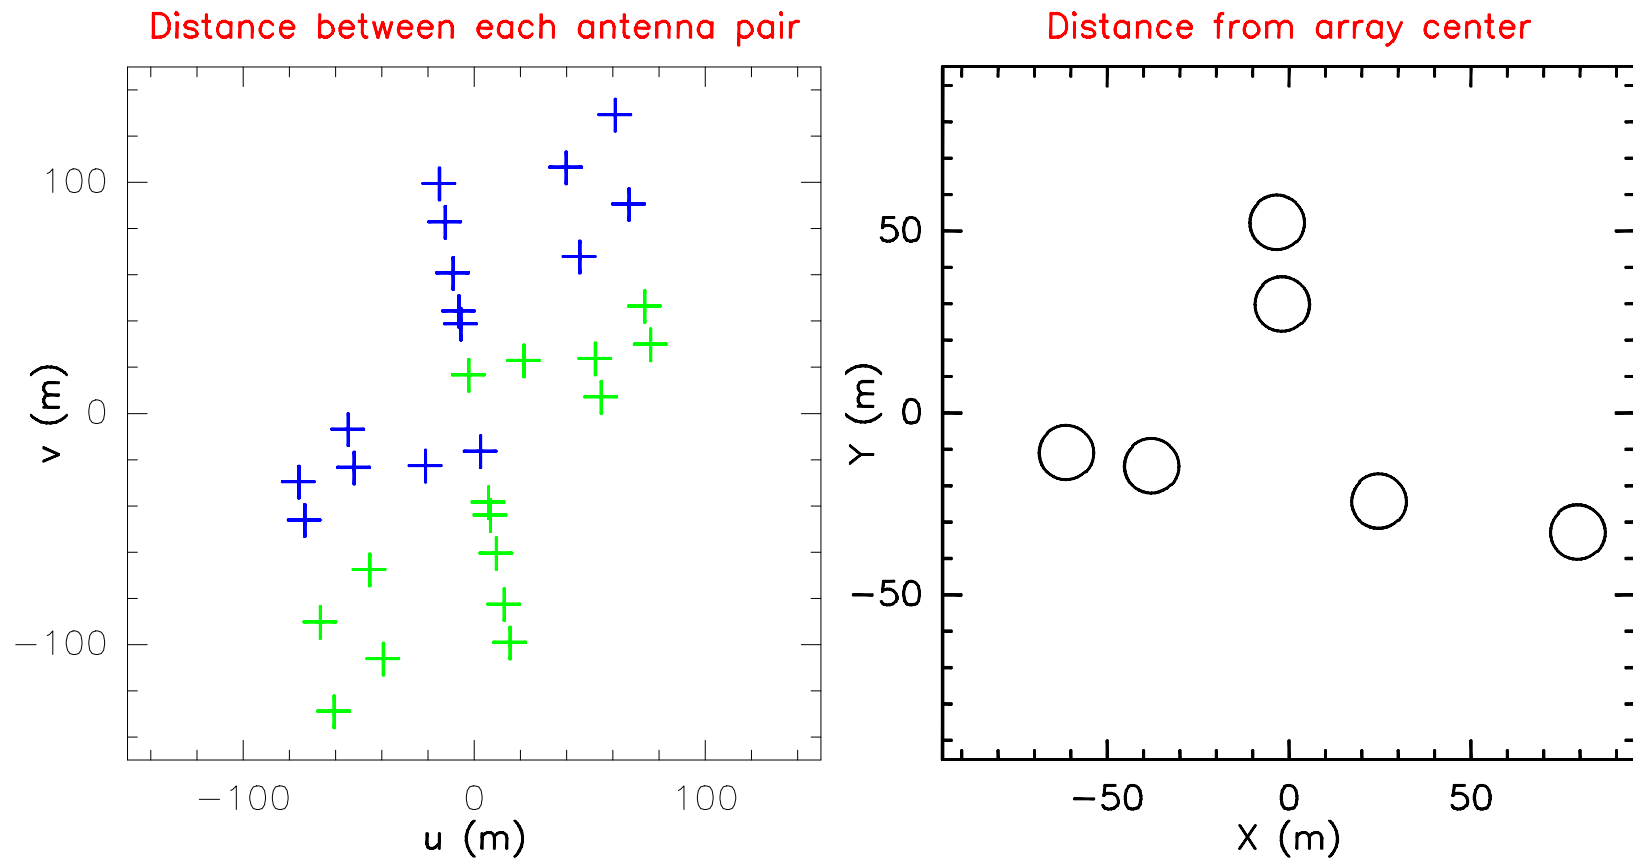

## Each Visibility is a Weighted Sum of the Fourier Components of the Source

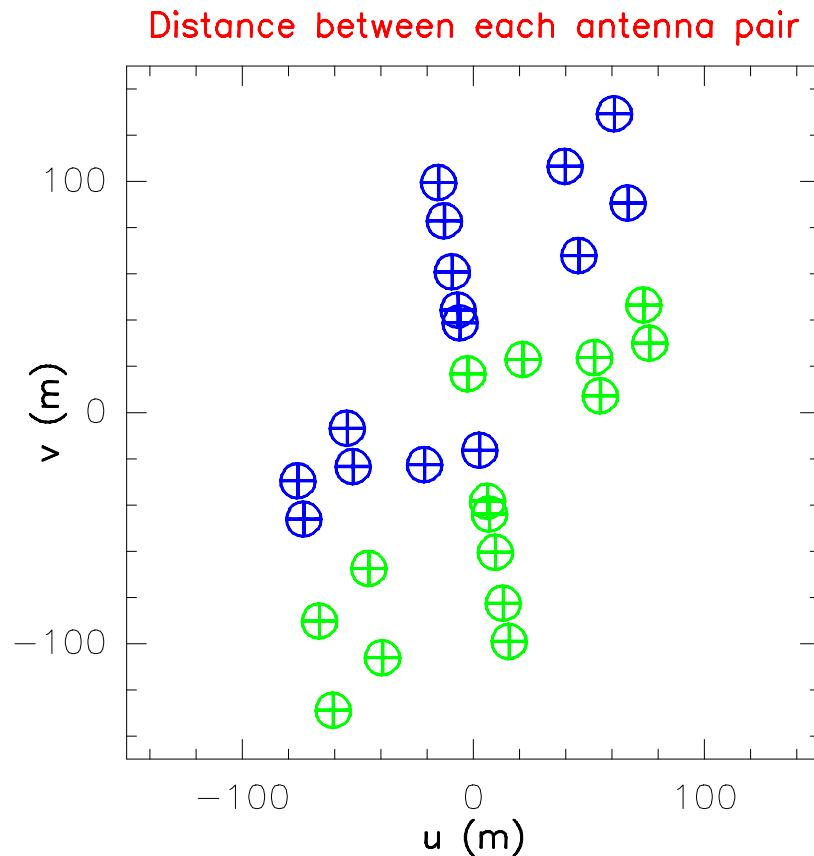

$$V_{ij}(b_{ij}) \stackrel{2D \text{ FT}}{\Leftrightarrow} B_{\text{primary}} \cdot I_{\text{source}}$$

i.e.  $V_{ij}(b_{ij}) = \{ \tilde{B}_{\text{primary}} * \tilde{I}_{\text{source}} \} (b_{ij})$

with  $\tilde{B}_{\text{primary}}$  a Gaussian of FWHM=15 m.

$\Rightarrow$  { Indirect information on the source  
(important for mosaicing).

# Mathematical Properties of Fourier Transform

- 1 Fourier Transform of a product of two functions  
= convolution of the Fourier Transform of the functions:

$$\text{If } (F_1 \xLeftrightarrow{\text{FT}} \tilde{F}_1 \text{ and } F_2 \xLeftrightarrow{\text{FT}} \tilde{F}_2), \text{ then } F_1 \cdot F_2 \xLeftrightarrow{\text{FT}} \tilde{F}_1 * \tilde{F}_2.$$

- 2 Sampling size  $\xLeftrightarrow{\text{FT}}$  Image size.

- 3 Bandwidth size  $\xLeftrightarrow{\text{FT}}$  Pixel size.


- 4 Finite support  $\xLeftrightarrow{\text{FT}}$  Infinite support.

- 5 Fourier transform evaluated at zero spacial frequency  
= Integral of your function.

$$V(u = 0, v = 0) \xLeftrightarrow{\text{FT}} \sum_{ij \in \text{image}} I_{ij}.$$



## Each Visibility is a Weighted Sum of the Fourier Components of the Source

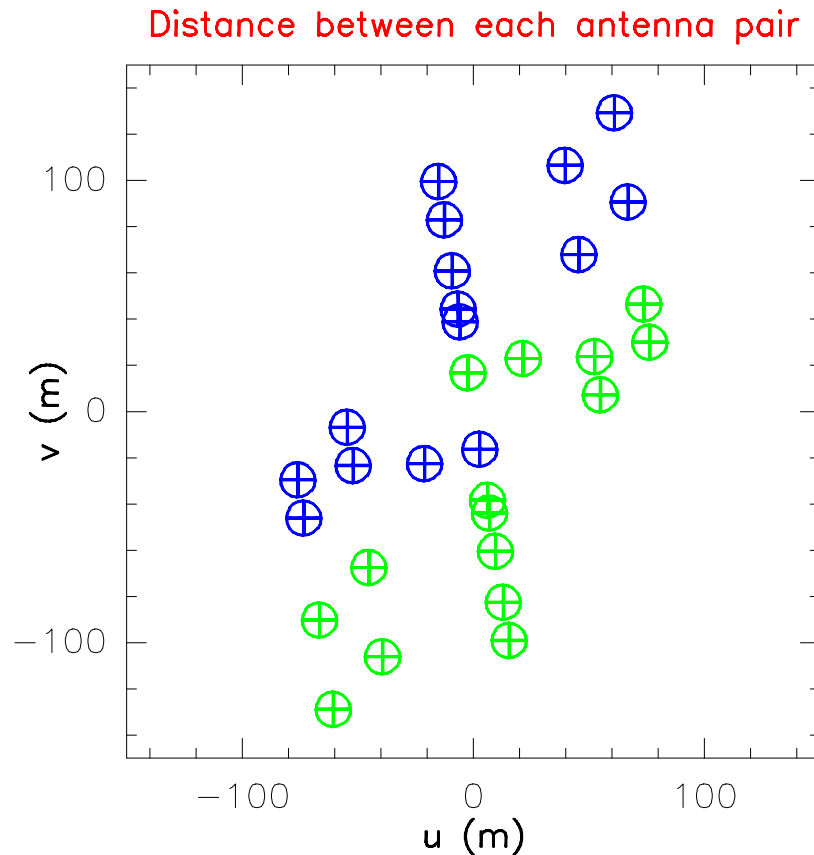

$$V_{ij}(b_{ij}) \stackrel{2D \text{ FT}}{\rightleftharpoons} B_{\text{primary}} \cdot I_{\text{source}}$$

i.e.  $V_{ij}(b_{ij}) = \{ \tilde{B}_{\text{primary}} * \tilde{I}_{\text{source}} \} (b_{ij})$


with  $\tilde{B}_{\text{primary}}$  a Gaussian of FWHM=15 m.

$\Rightarrow$  { Indirect information on the source  
(important for mosaicing).

## An Example: The PdBI (Cont'd)

Number of baselines:  $N(N - 1) = 30$  for  $N = 6$  antennas.


Convention: Fourier plane =  $uv$  plane.

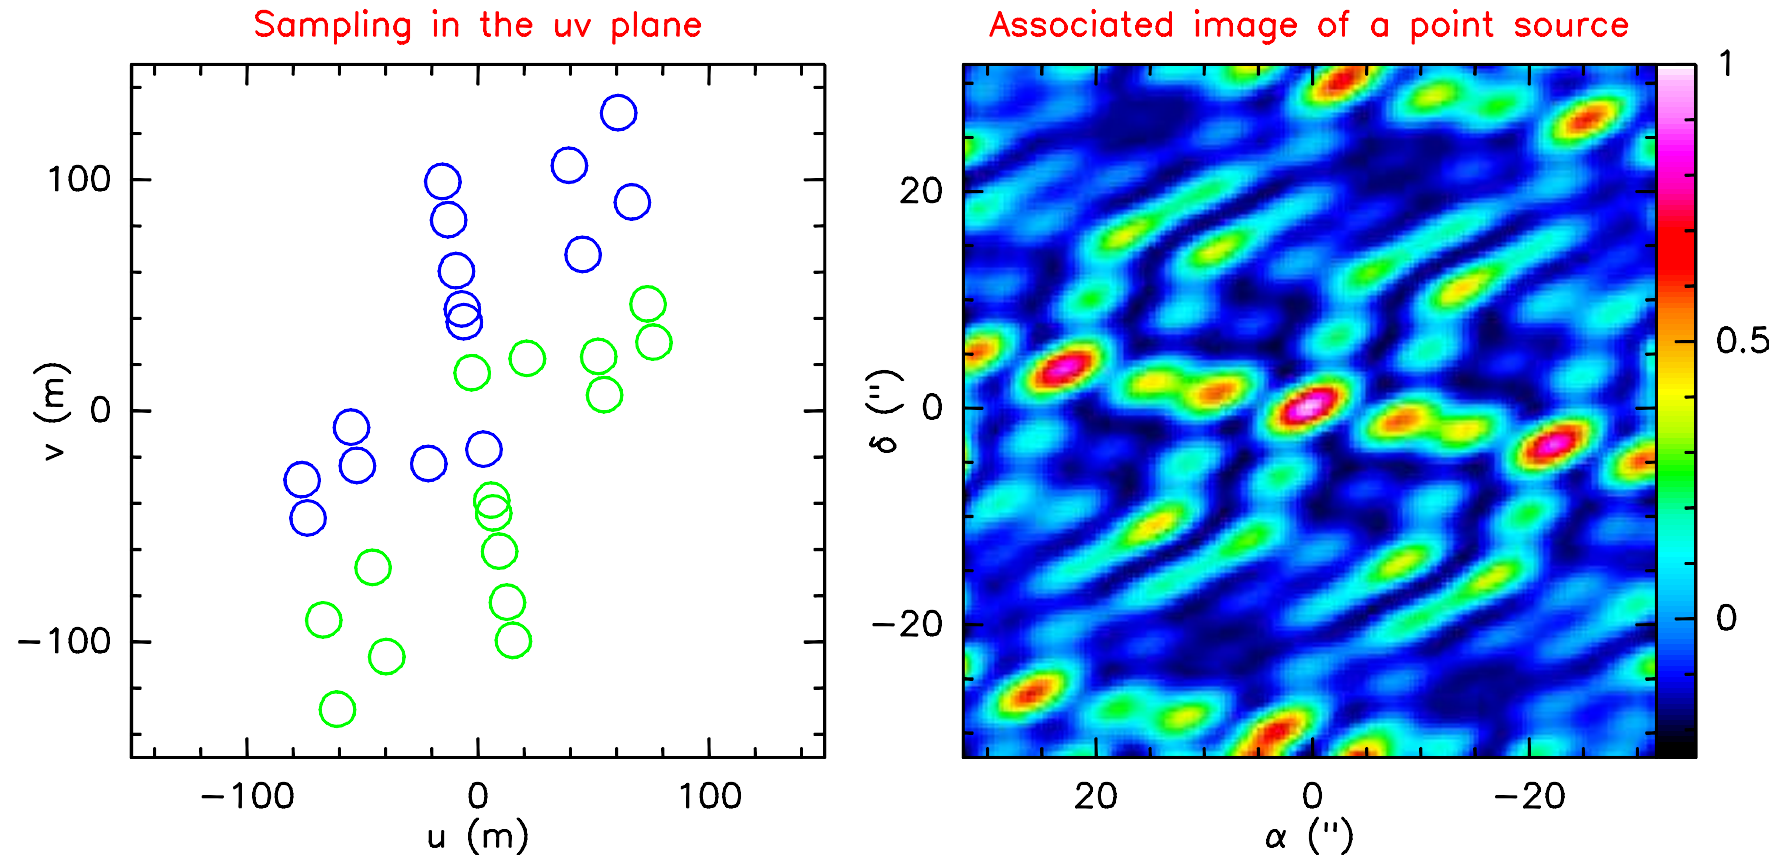

Incomplete  $uv$  plane coverage  $\Rightarrow$  difficult to make a reliable image  
(Lectures by C. Feruglio, J. Pety and F. Gueth).

# Earth Rotation and Super Synthesis



Precision: Spatial frequencies = baseline lengths **projected** onto a plane perpendicular to the source mean direction.

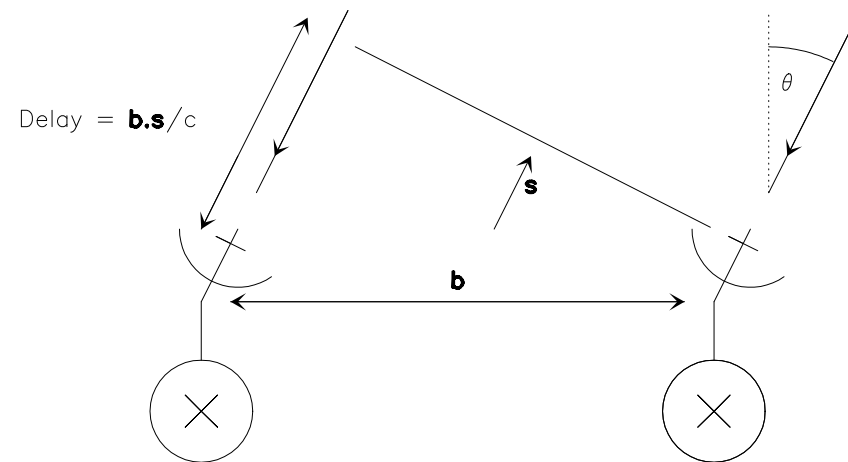

## Earth Rotation and Super Synthesis

Precision: Spatial frequencies = baseline lengths **projected** onto a plane perpendicular to the source mean direction.



Advantage: Possibility to measure different Fourier components without moving antennas!

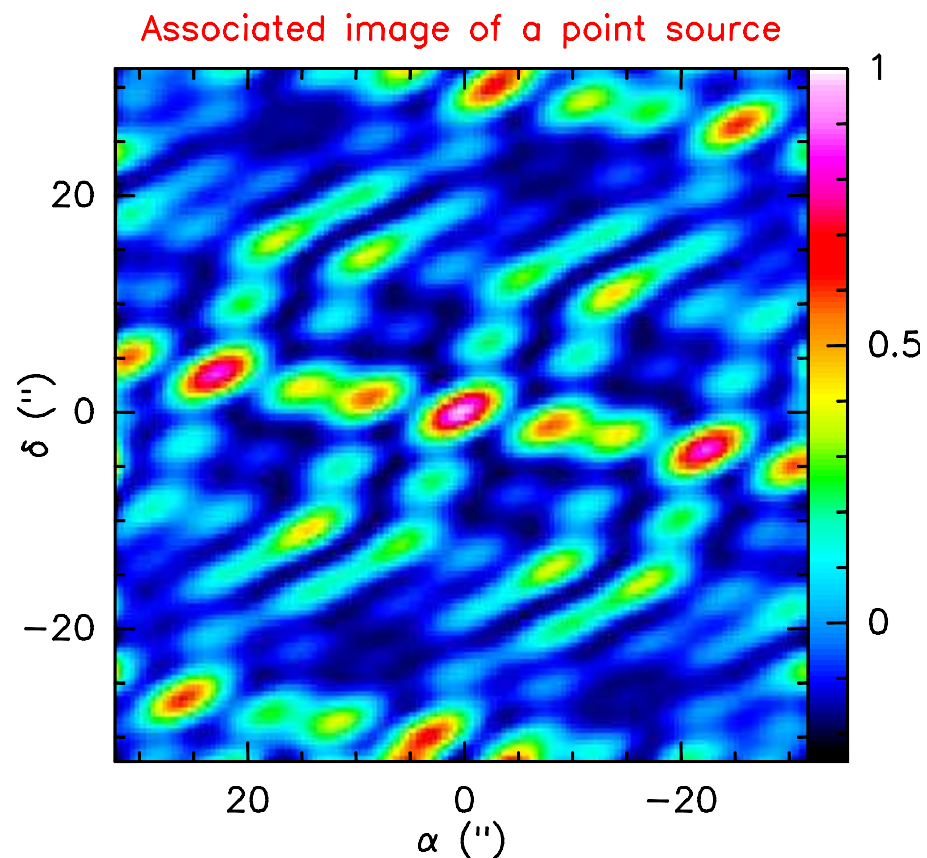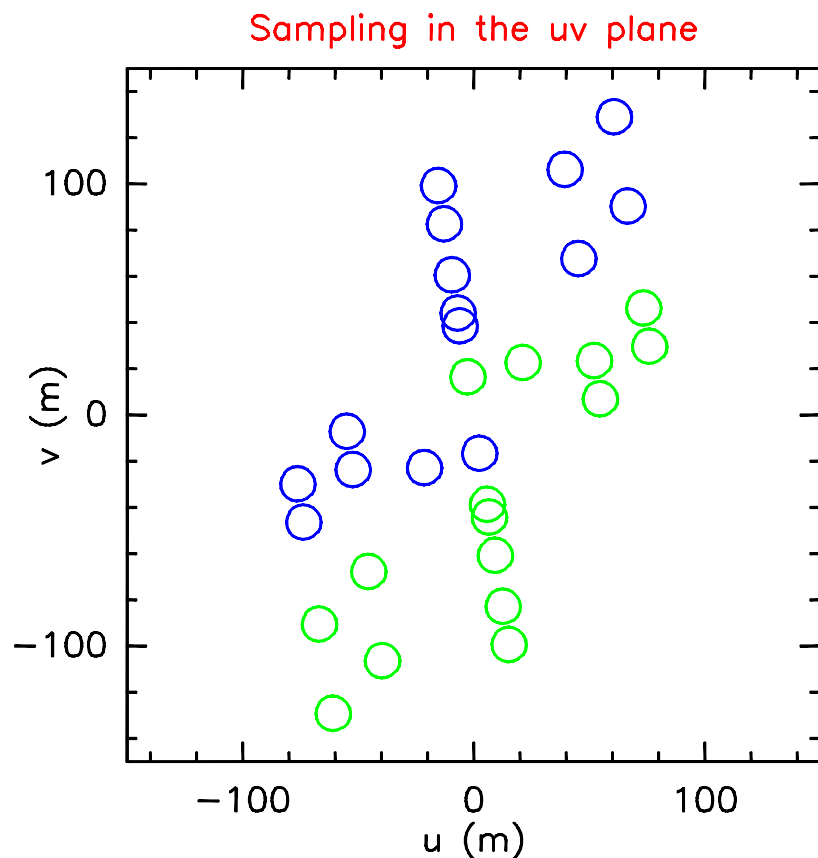

## Earth Rotation and Super Synthesis

Precision: Spatial frequencies = baseline lengths **projected** onto a plane perpendicular to the source mean direction.



Advantage: Possibility to measure different Fourier components without moving antennas!

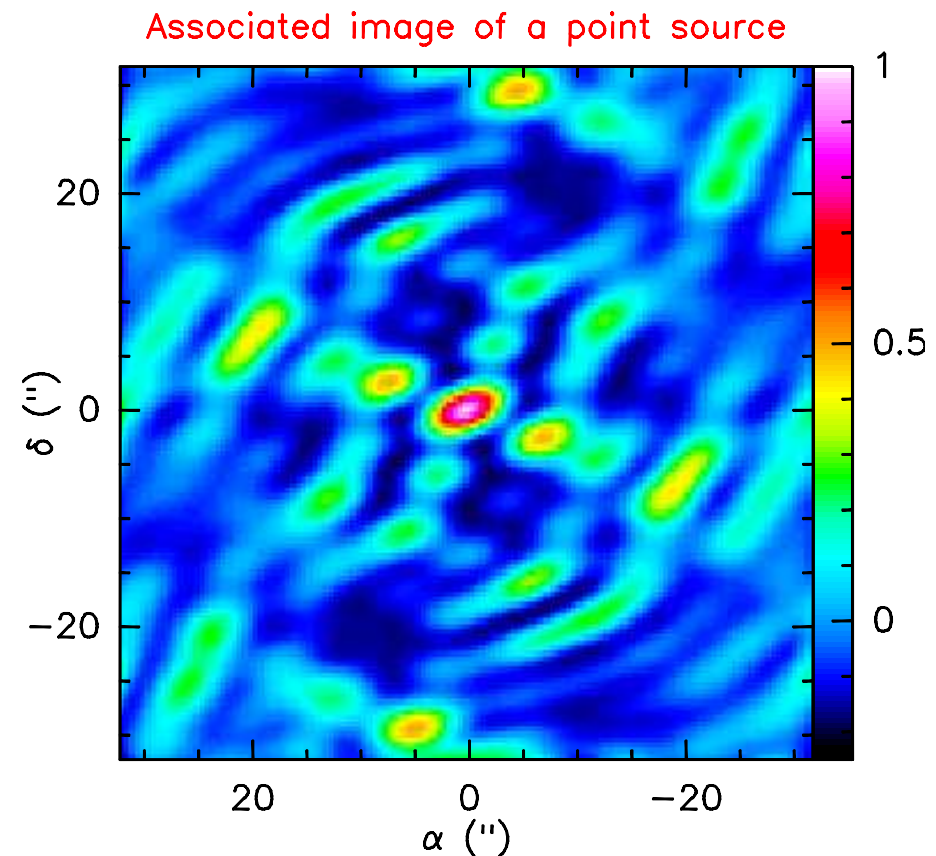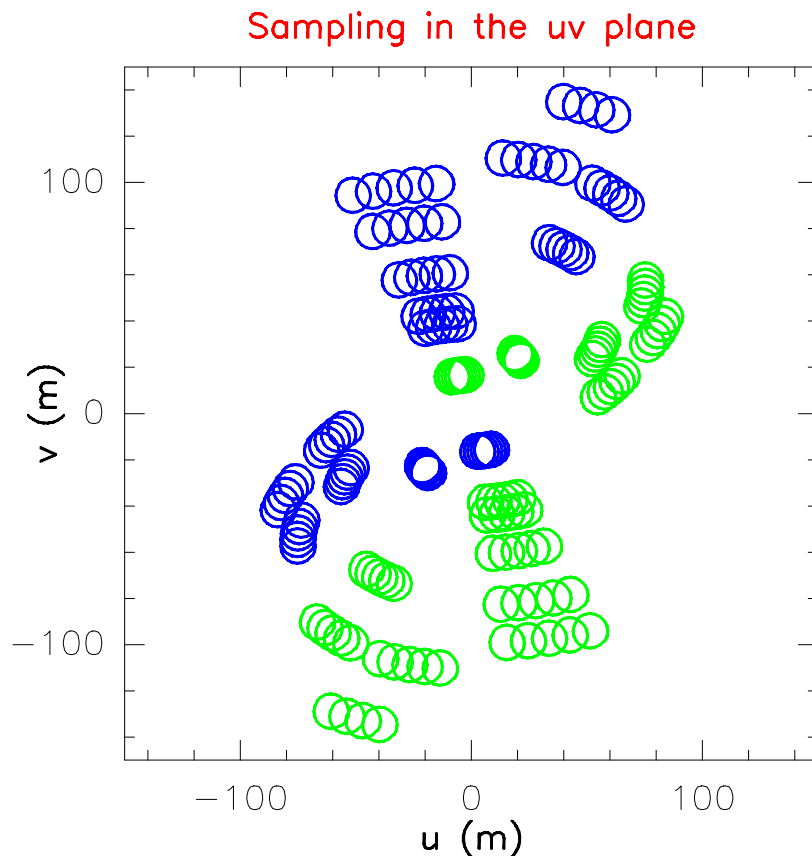

## Earth Rotation and Super Synthesis

Precision: Spatial frequencies = baseline lengths **projected** onto a plane perpendicular to the source mean direction.

Advantage: Possibility to measure different Fourier components without moving antennas!

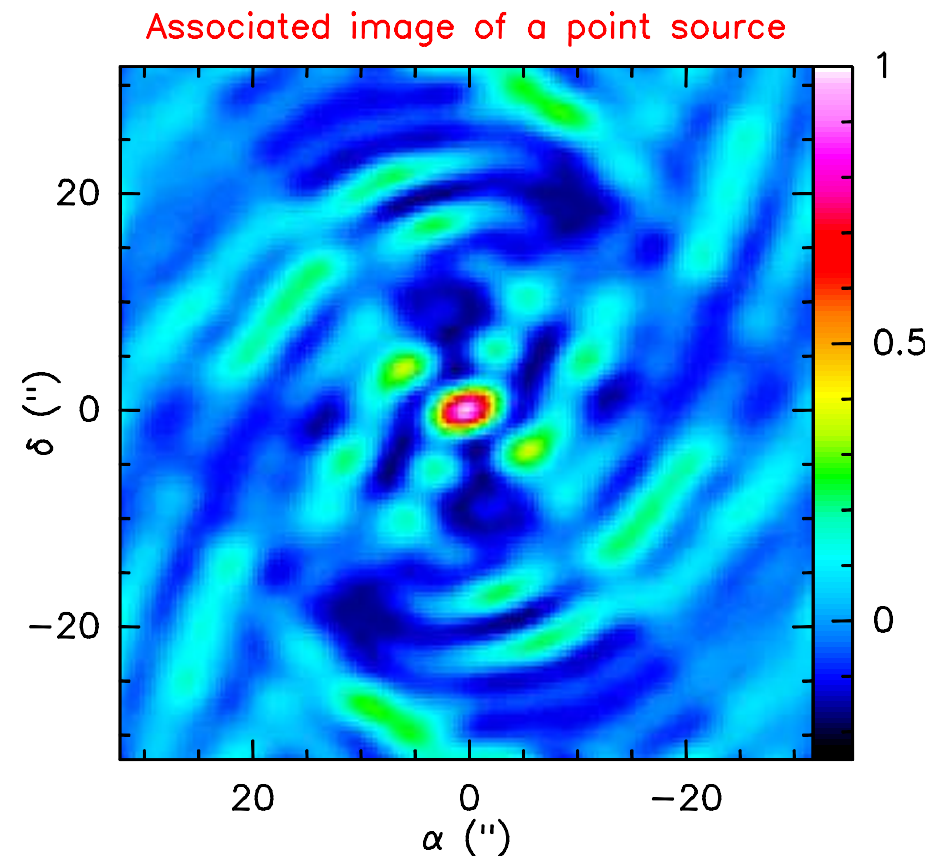
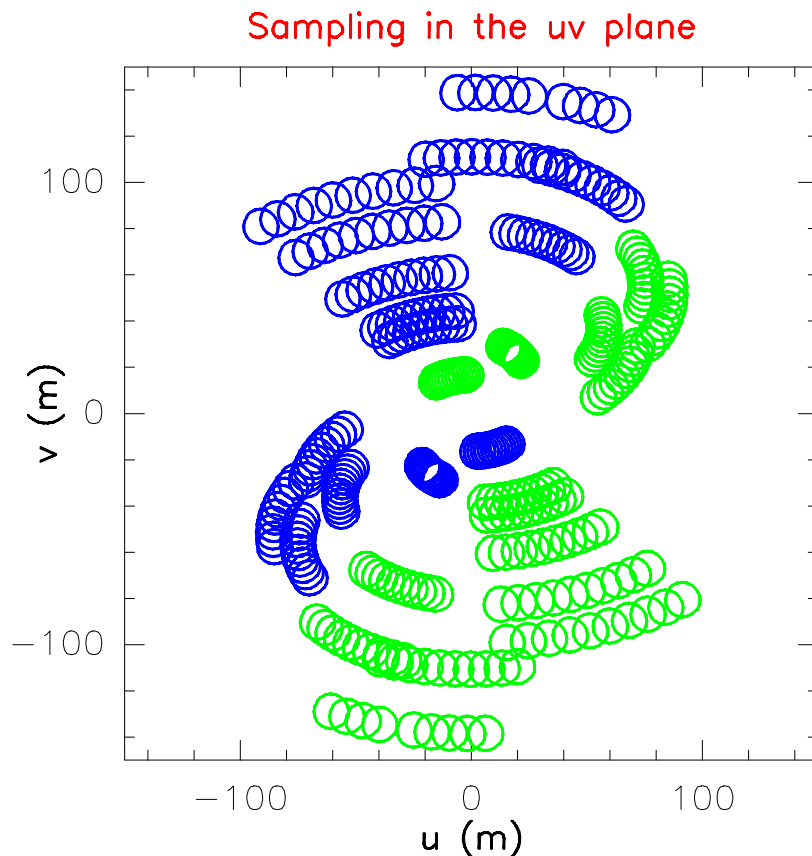




## Earth Rotation and Super Synthesis

Precision: Spatial frequencies = baseline lengths **projected** onto a plane perpendicular to the source mean direction.



Advantage: Possibility to measure different Fourier components without moving antennas!

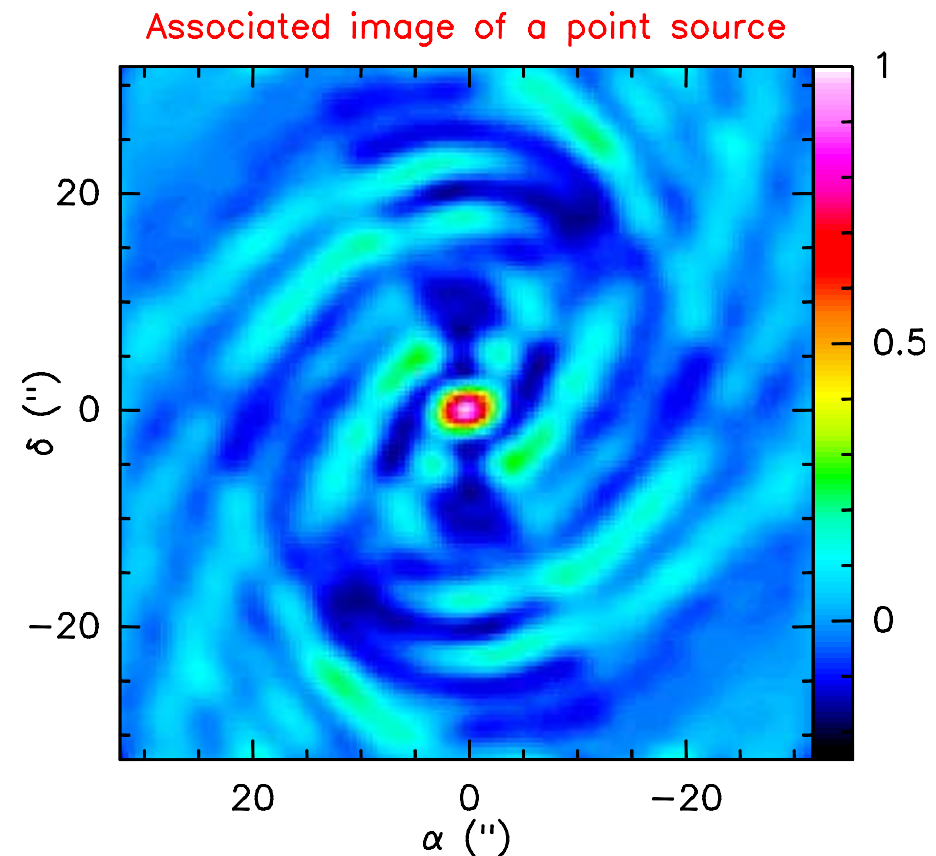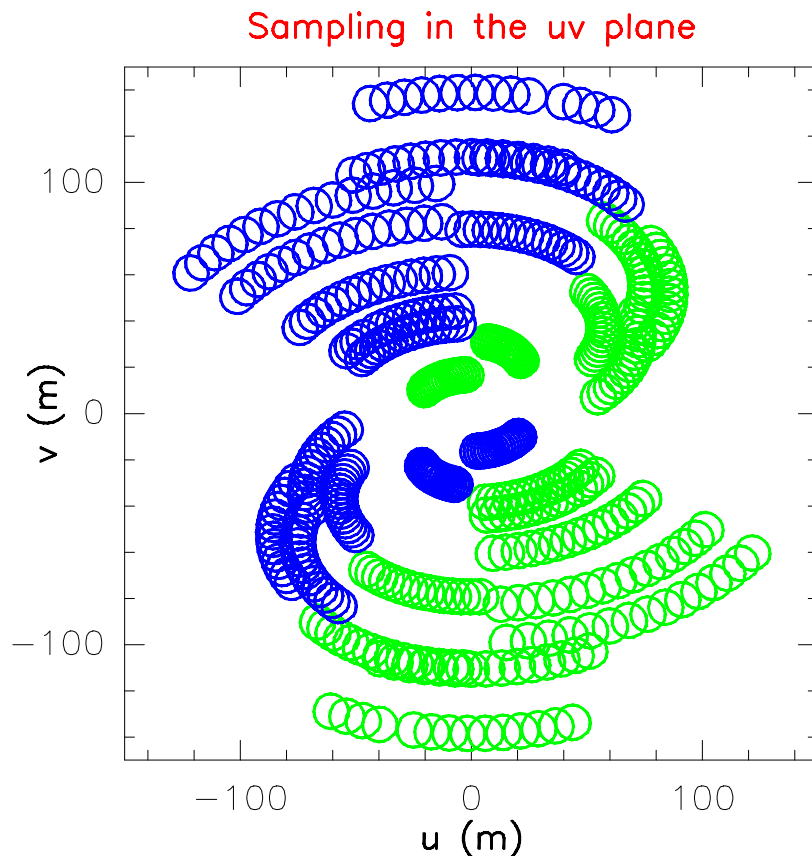

## Earth Rotation and Super Synthesis

Precision: Spatial frequencies = baseline lengths **projected** onto a plane perpendicular to the source mean direction.

Advantage: Possibility to measure different Fourier components without moving antennas!

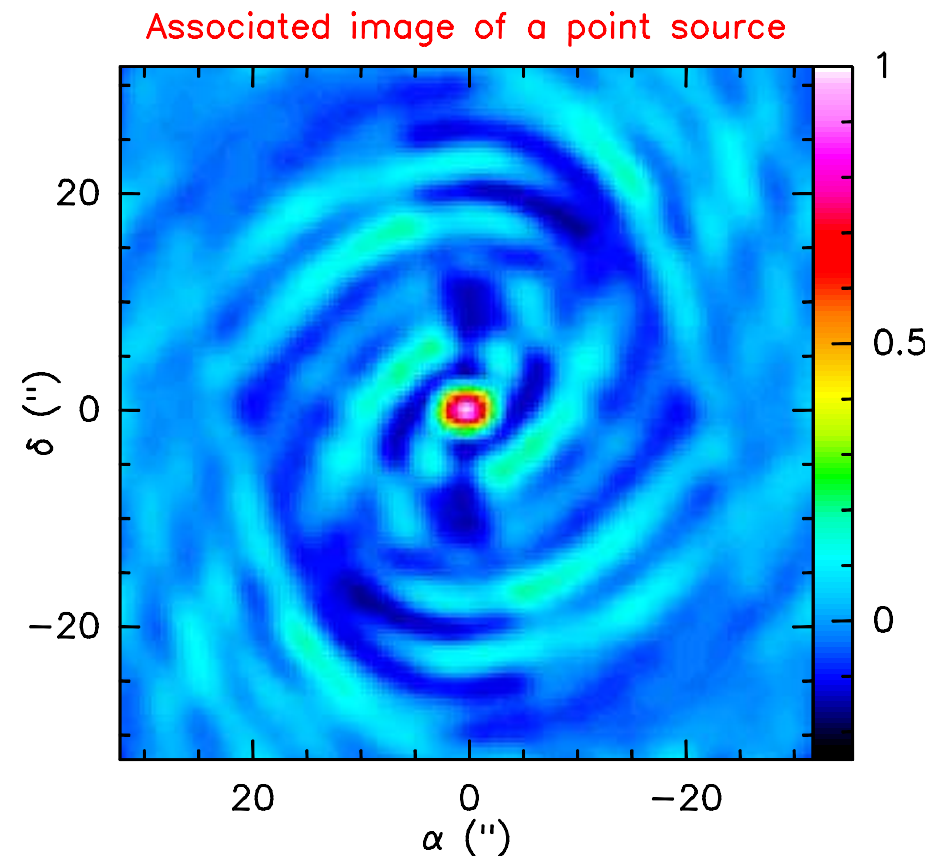
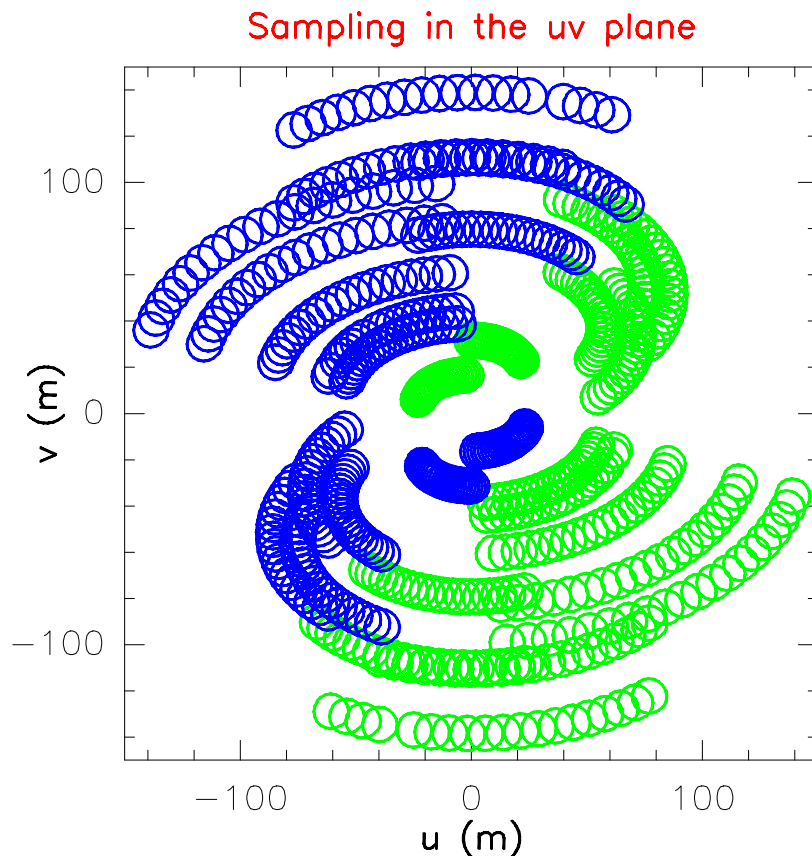




## Earth Rotation and Super Synthesis

Precision: Spatial frequencies = baseline lengths **projected** onto a plane perpendicular to the source mean direction.



Advantage: Possibility to measure different Fourier components without moving antennas!

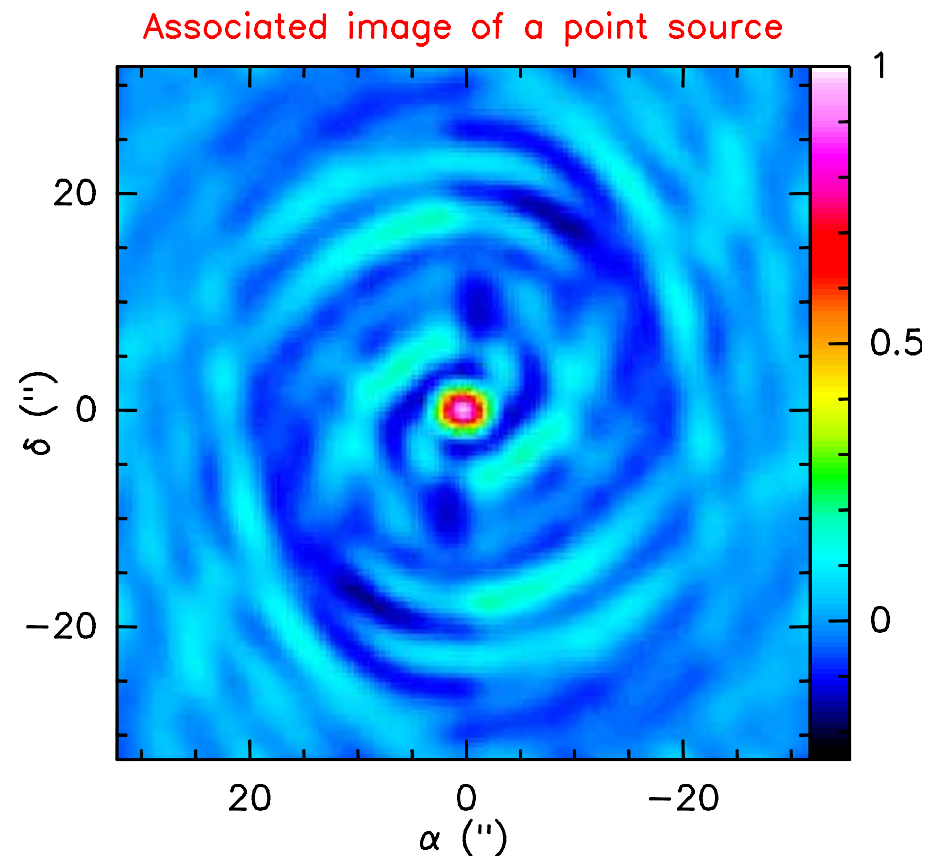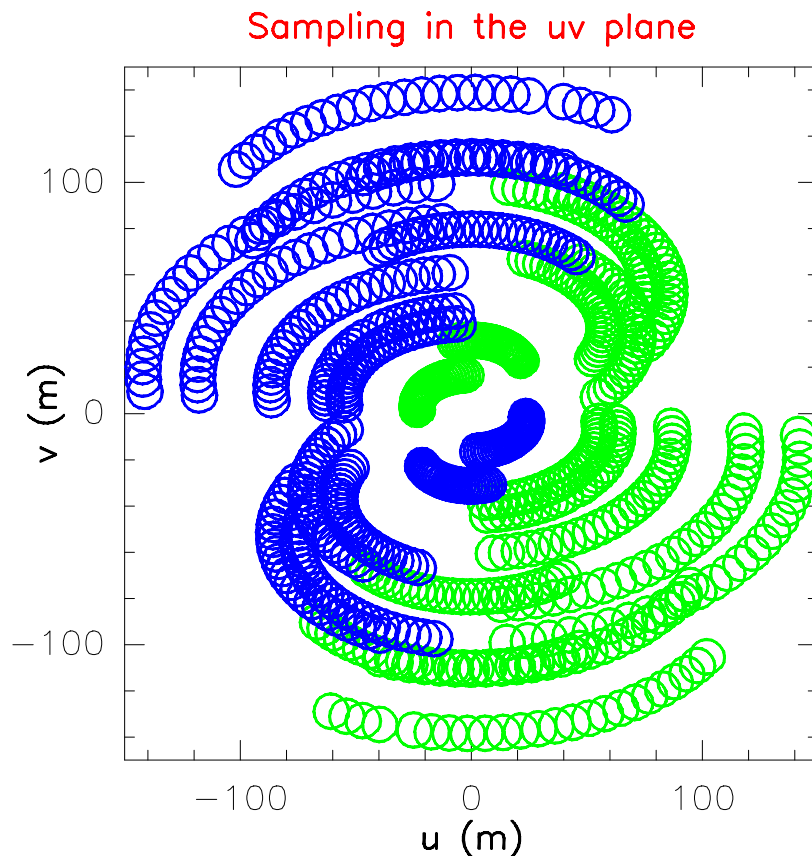

## Earth Rotation and Super Synthesis

Precision: Spatial frequencies = baseline lengths **projected** onto a plane perpendicular to the source mean direction.



Advantage: Possibility to measure different Fourier components without moving antennas!

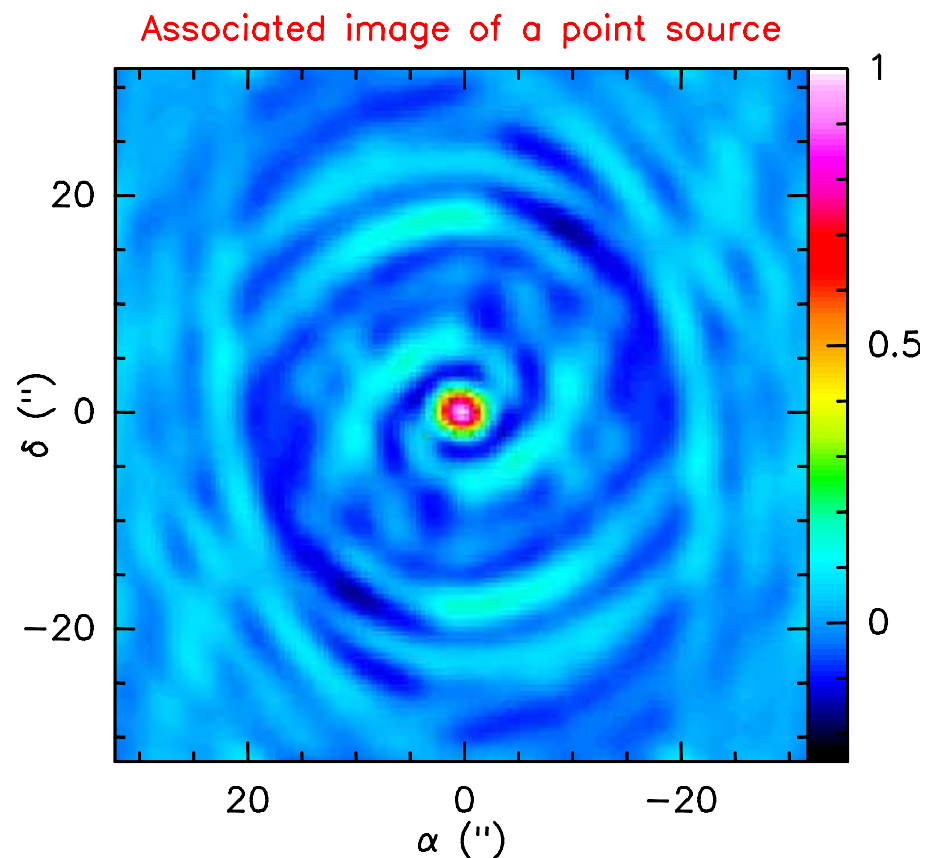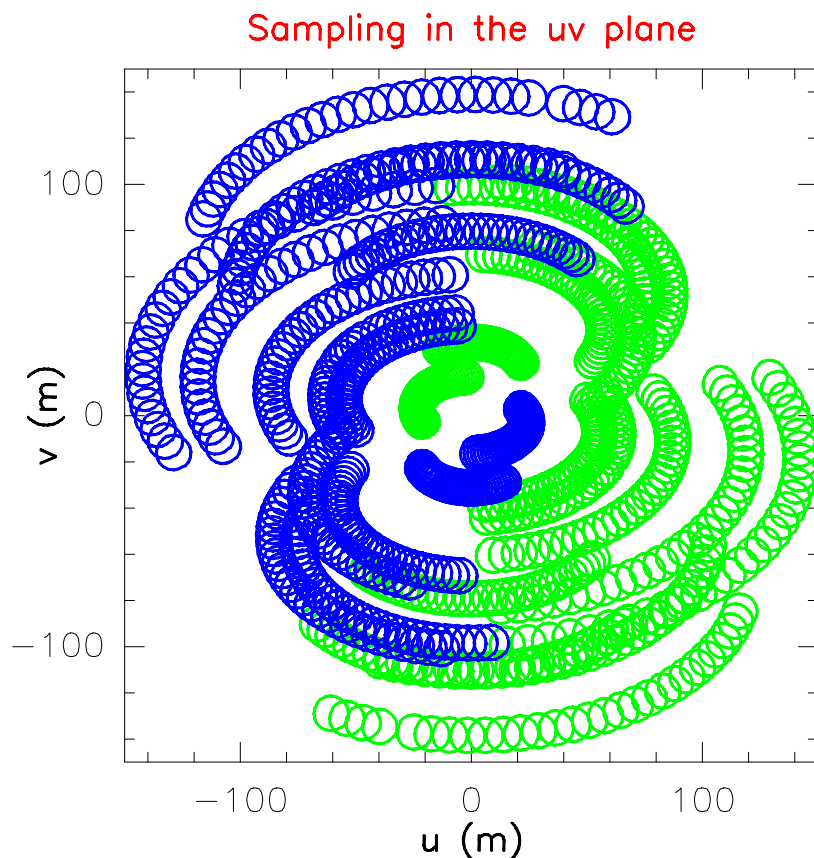

## Earth Rotation and Super Synthesis

Precision: Spatial frequencies = baseline lengths **projected** onto a plane perpendicular to the source mean direction.

Advantage: Possibility to measure different Fourier components without moving antennas!

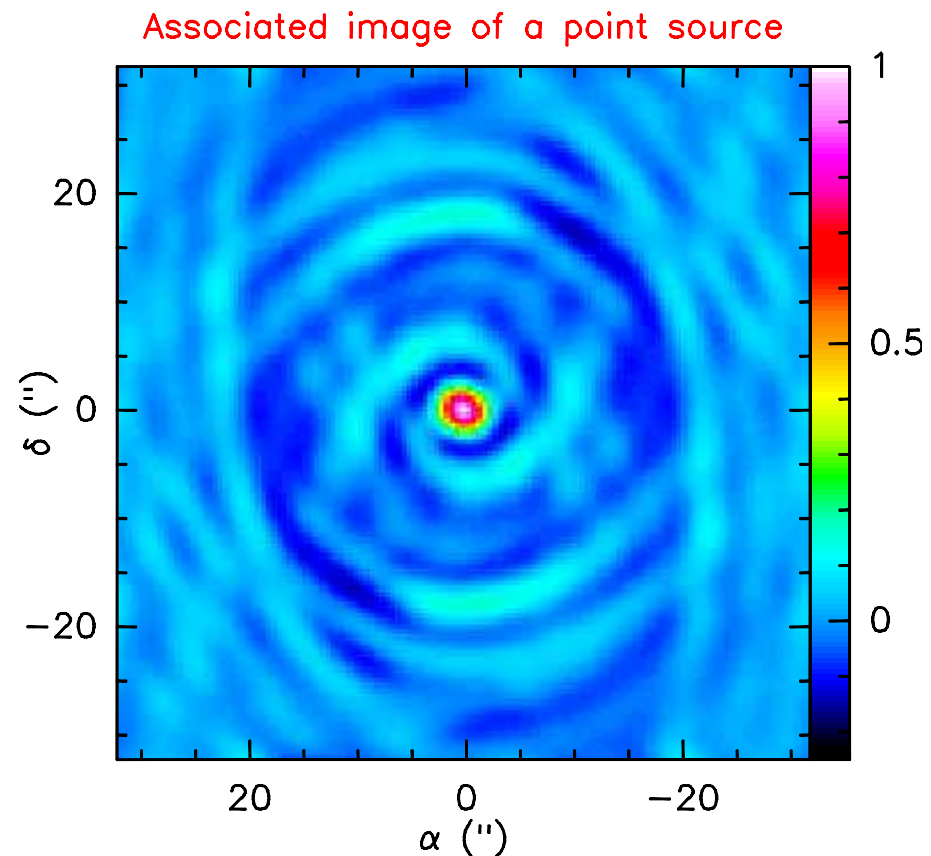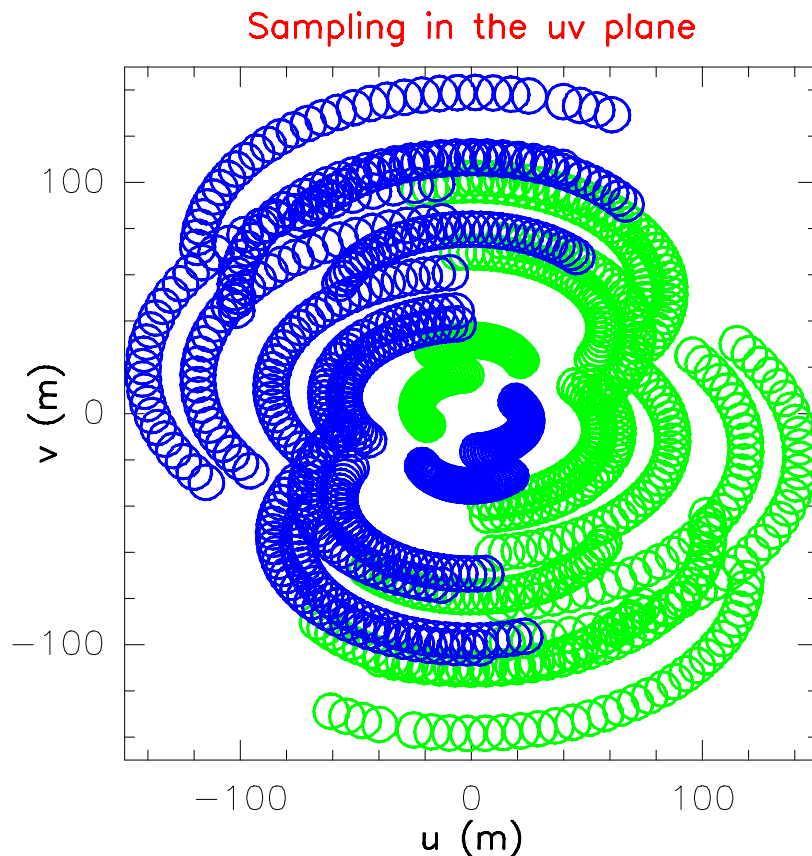



# Delay Correction: I. Why?

Real life: Source **not** at zenith.

⇒ { Wave plane arrives at different moment on each antenna.

Temporal coherence:

- $E(t) = E_0 \cos(\omega t + \psi)$
- Temporally Incoherent Source = random phase changes.
- Coherence time: mean time over which wave phase = constant.

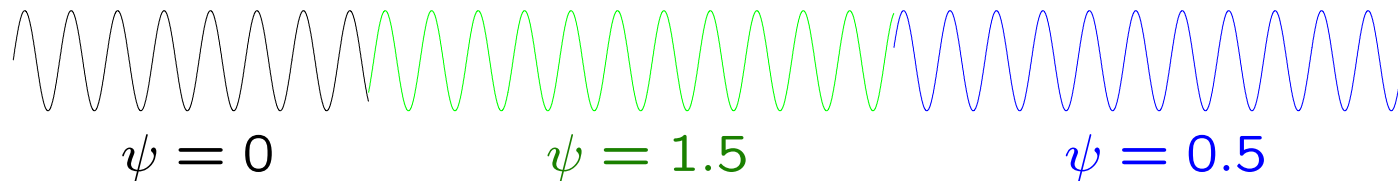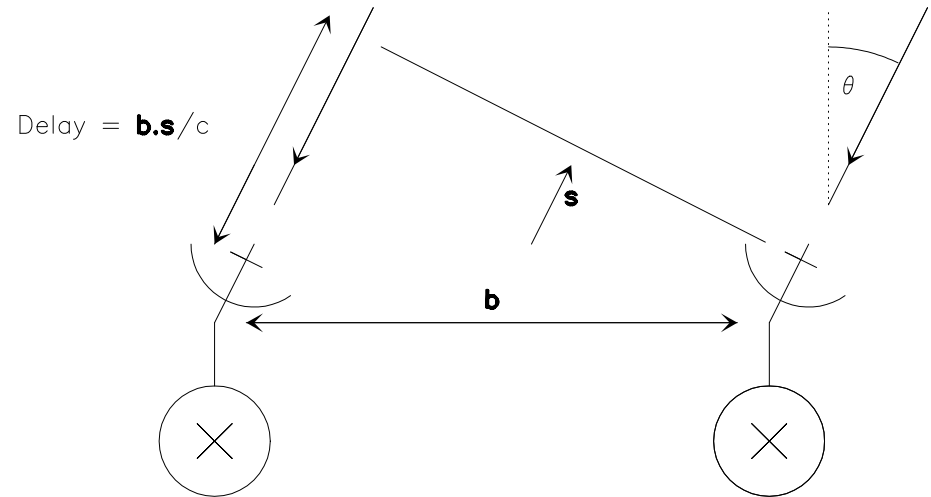


Problem: (Coherence time  $\lesssim$  delay) ⇒ fringes disappear!

## Delay Correction: II. Earth rotation

Earth rotation:

- Advantage: Super synthesis;
- Inconvenient: Delay correction varies with time!

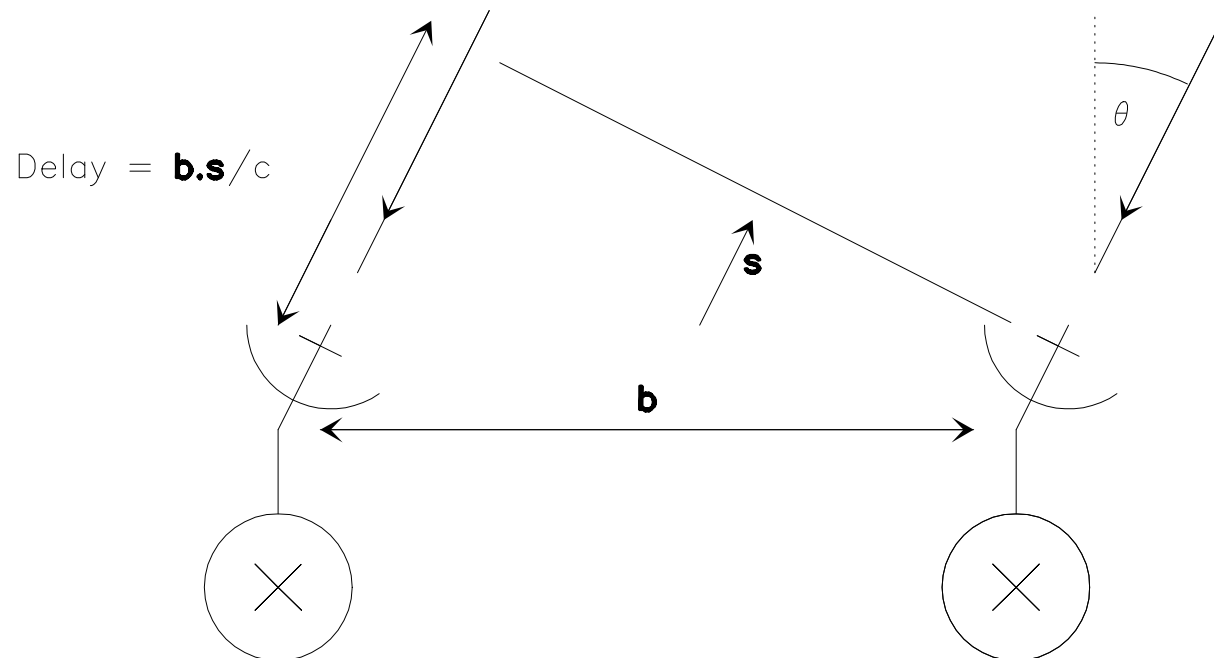



# Delay Correction: III. Finite Bandwidth

Real life: Observation of finite bandwidth.

⇒ polychromatic light.

Perfect delay correction

⇒ White fringes in 0.

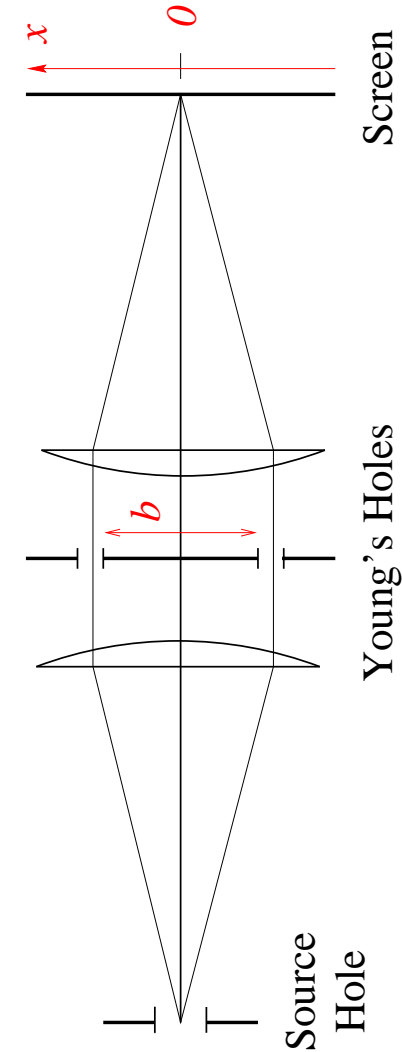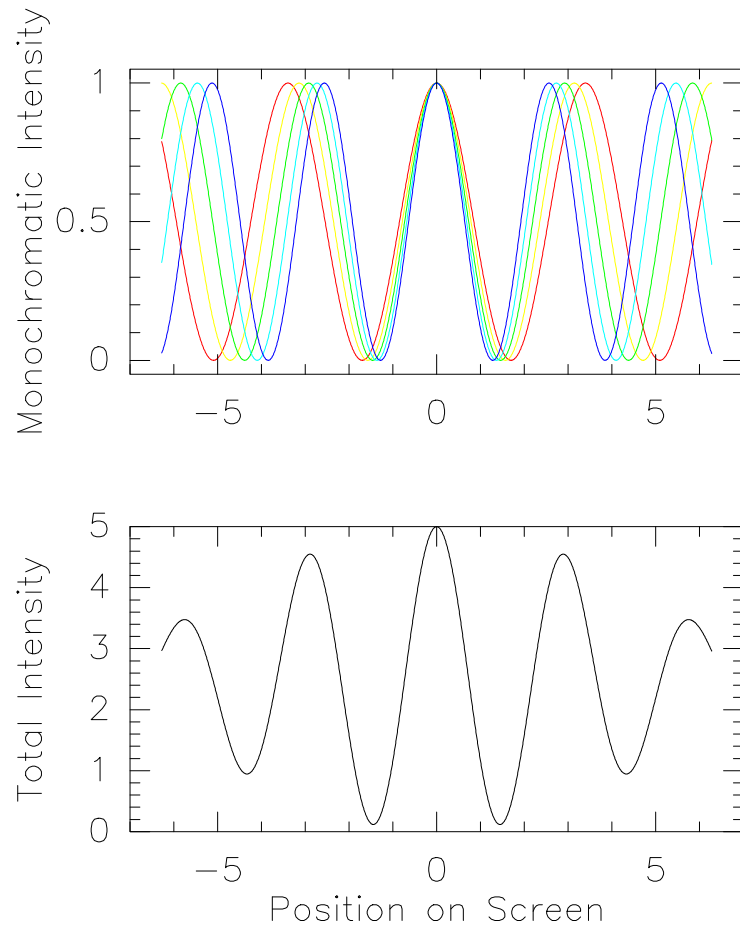


# Delay Correction: III. Finite Bandwidth

Real life: Observation of finite bandwidth.

⇒ polychromatic light.

Perfect delay correction


⇒ White fringes in 0.

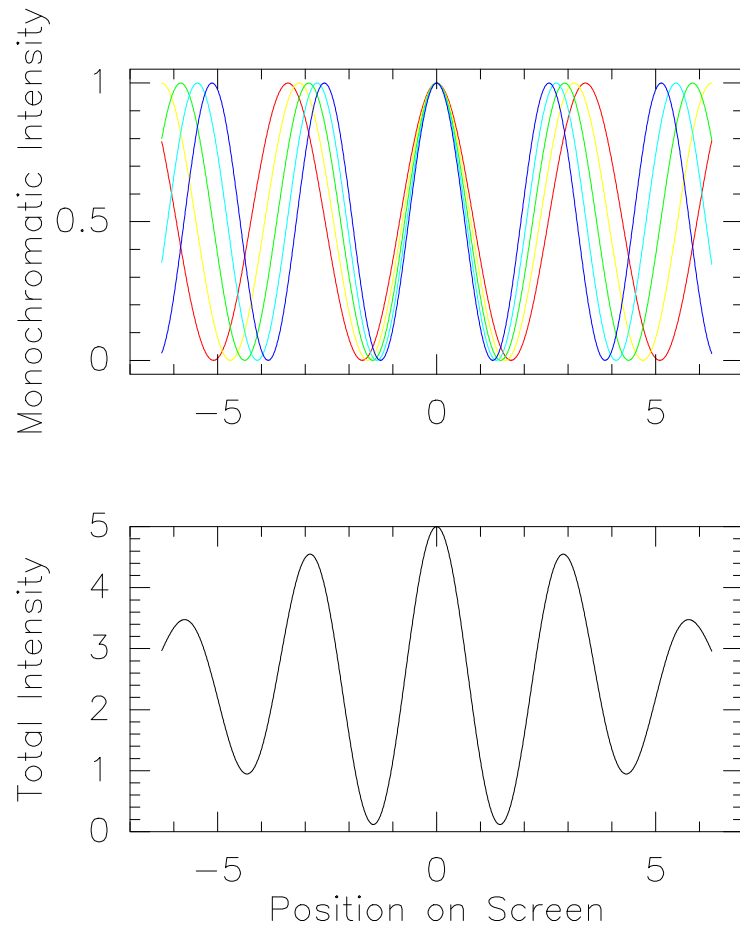

Worse and worse delay correction.

⇒ Translation of the fringe pattern.

⇒ Fringes seem to disappear.

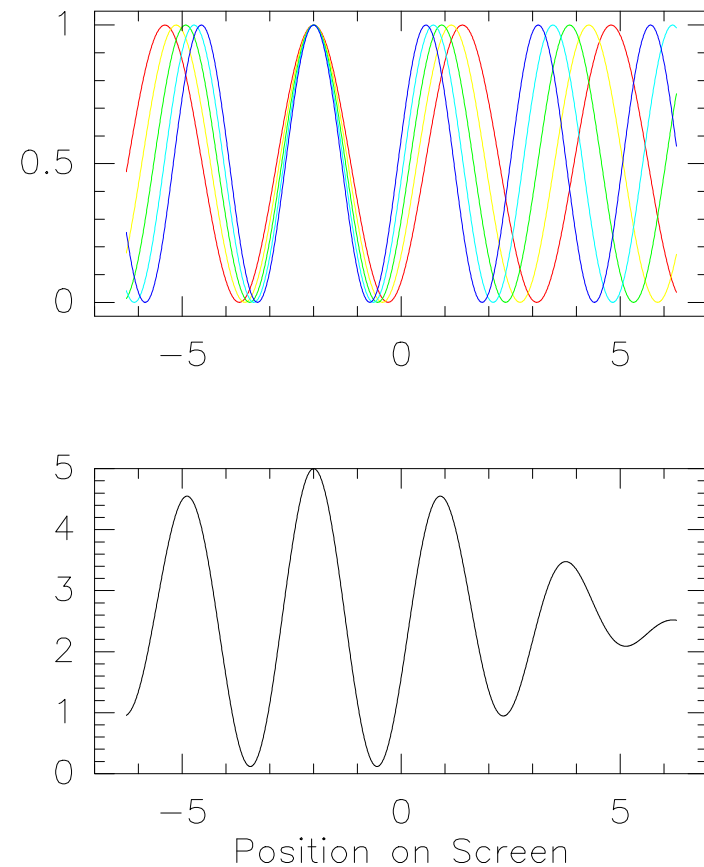


# Delay Correction: III. Finite Bandwidth

Real life: Observation of finite bandwidth.

⇒ polychromatic light.

Perfect delay correction


⇒ White fringes in 0.

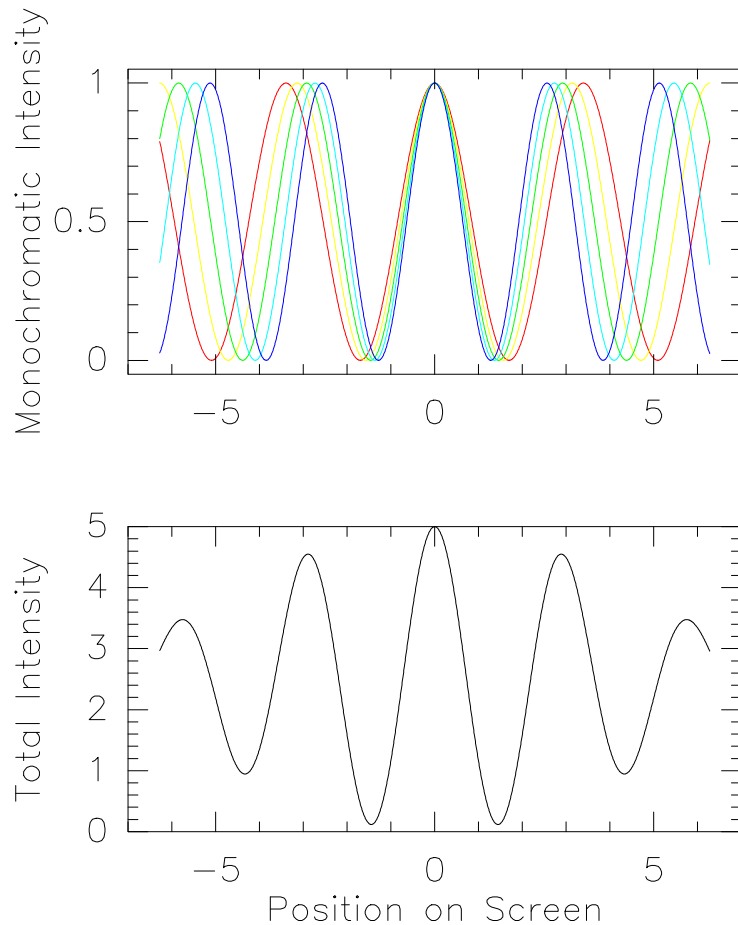

Worse and worse delay correction.

⇒ Translation of the fringe pattern.

⇒ Fringes seem to disappear.

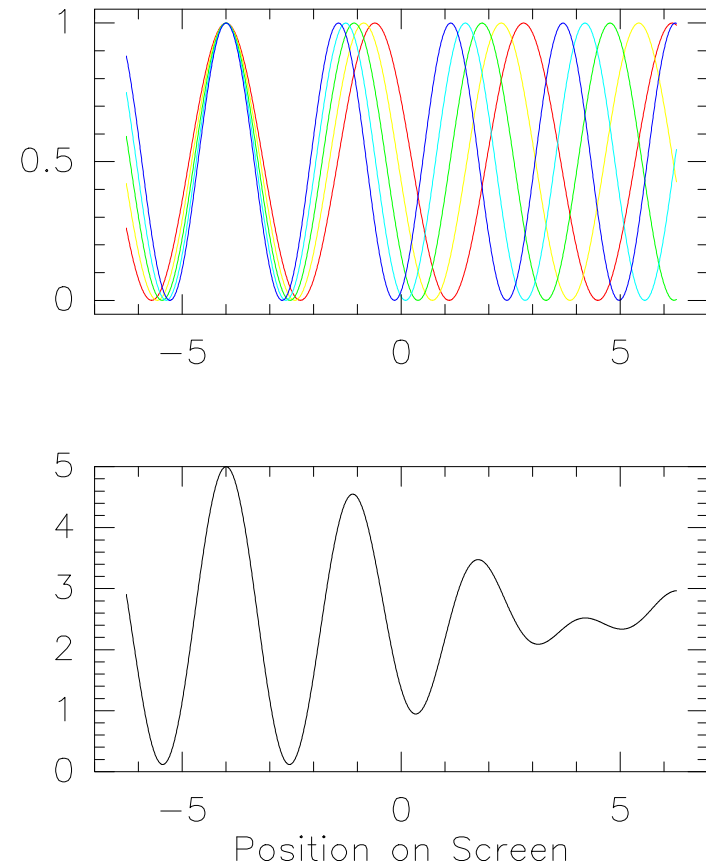




# Delay Correction: III. Finite Bandwidth

Real life: Observation of finite bandwidth.

⇒ polychromatic light.

Perfect delay correction


⇒ White fringes in 0.

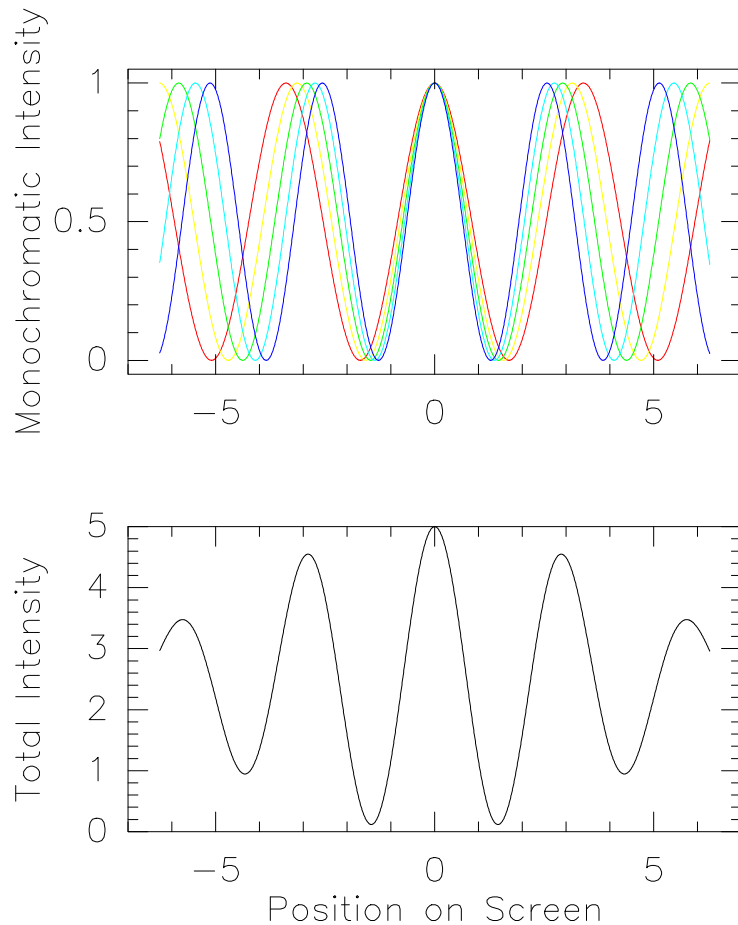

Worse and worse delay correction.

⇒ Translation of the fringe pattern.

⇒ Fringes seem to disappear.

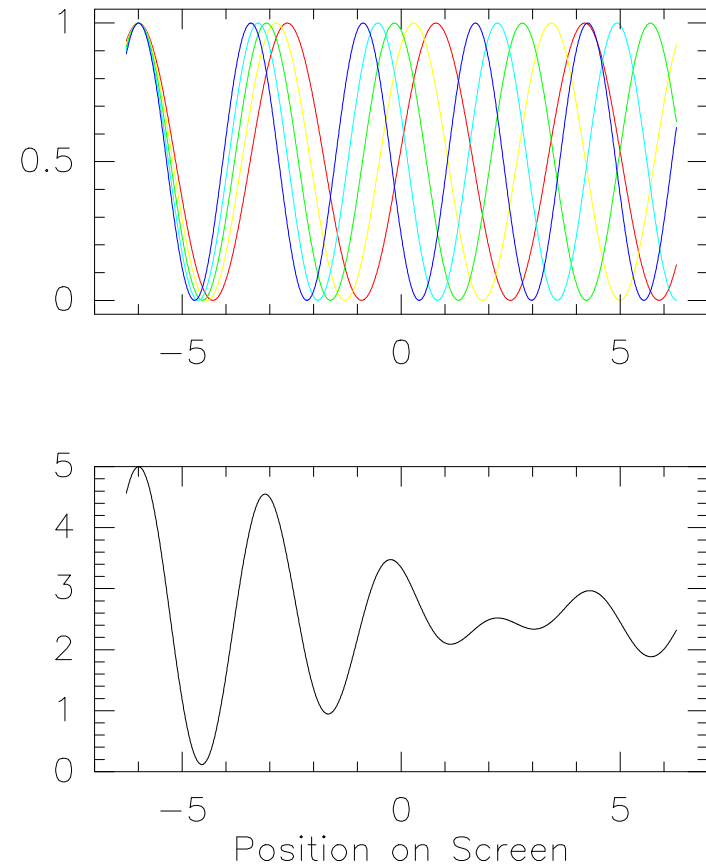


# Delay Correction: III. Finite Bandwidth

Real life: Observation of finite bandwidth.

⇒ polychromatic light.

Perfect delay correction


⇒ White fringes in 0.

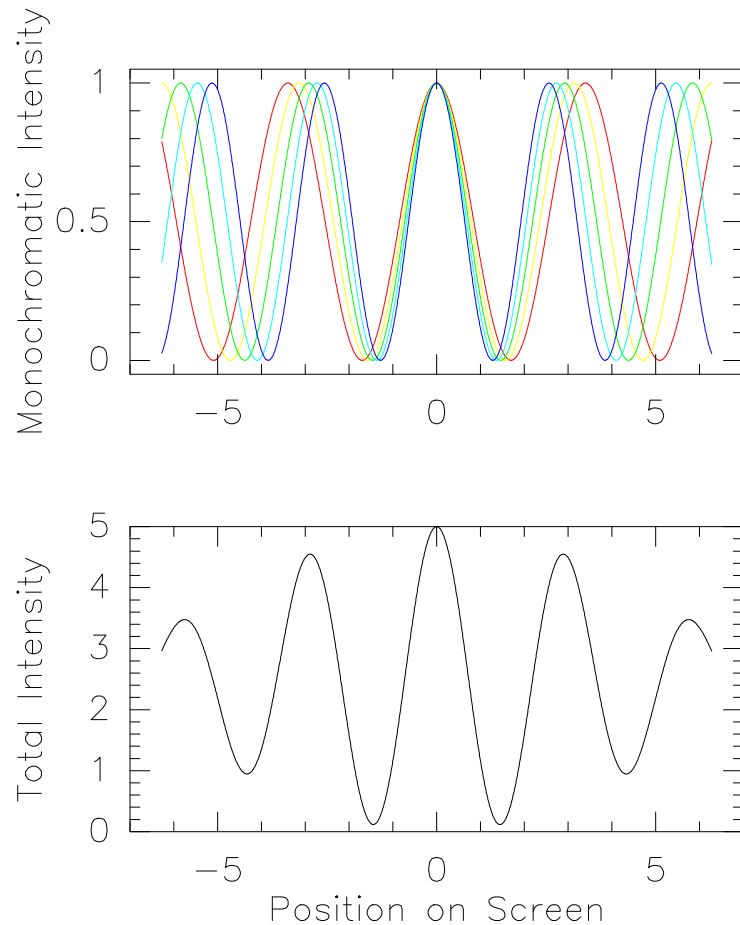

Worse and worse delay correction.

⇒ Translation of the fringe pattern.

⇒ Fringes seem to disappear.

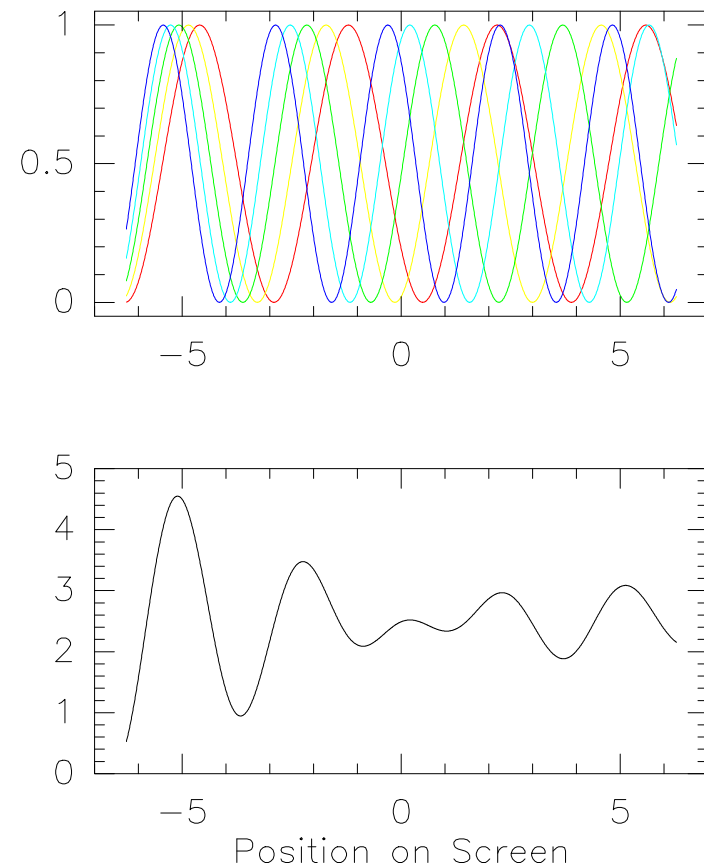


# Delay Correction: III. Finite Bandwidth

Real life: Observation of finite bandwidth.

⇒ polychromatic light.

Perfect delay correction


⇒ White fringes in 0.

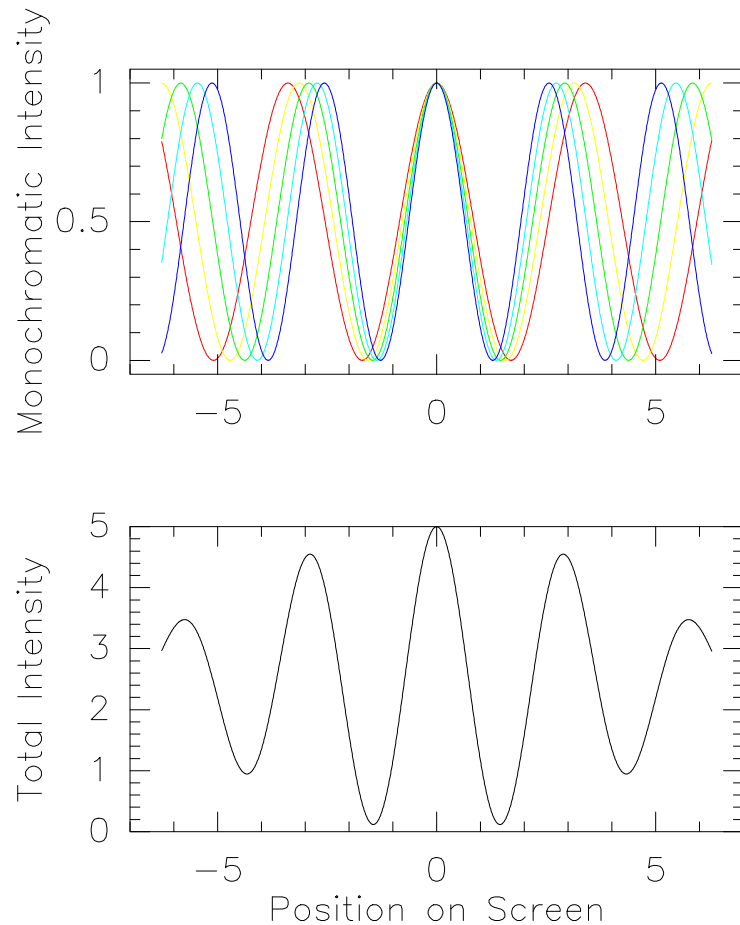

Worse and worse delay correction.


⇒ Translation of the fringe pattern.

⇒ Fringes seem to disappear.

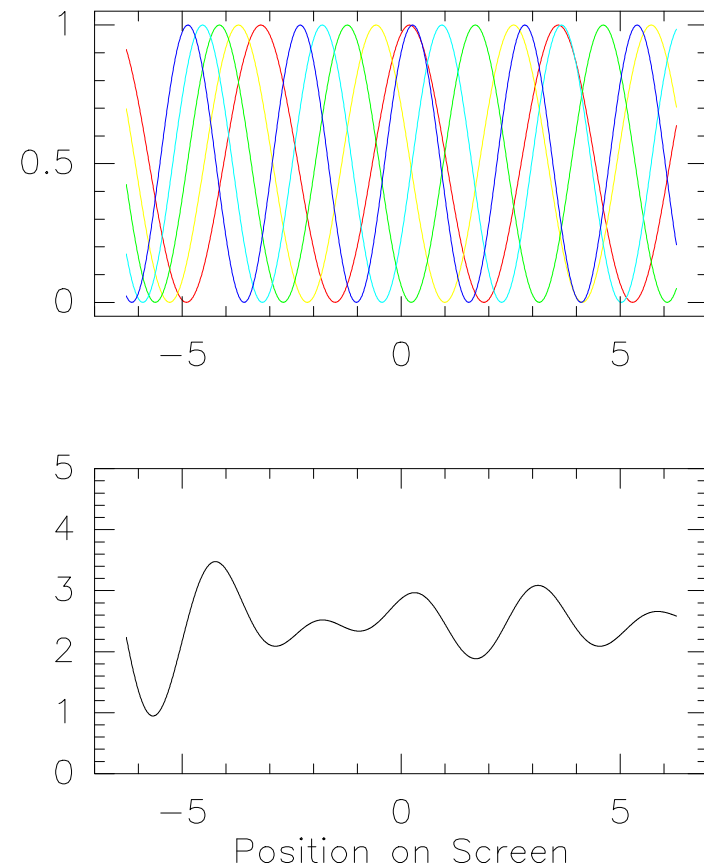


# Optic vs Radio Interferometer: I. Measurement Method

	Optic	Radio
Detector { Kind Observable	Quadratic $I =  EE^* $	Linear (Heterodyne) $ E  \exp(i\psi)$
Measure { Method Quantity	Optical fringes $ C  = \frac{I_{\max} - I_{\min}}{I_{\max} + I_{\min}}$	Electronic correlation $ V  \exp(i\phi_V) = \langle E_1 \cdot E_2 \rangle$
Interferometer kind	Additive	Multiplicative

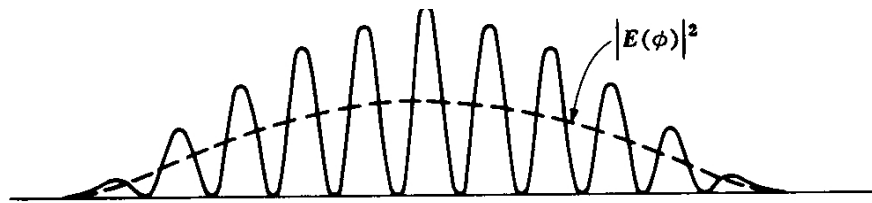

$$I_1 + I_2 + 2\sqrt{I_1 I_2} |C| \cos\left(\frac{bx}{\lambda} + \phi_C\right)$$


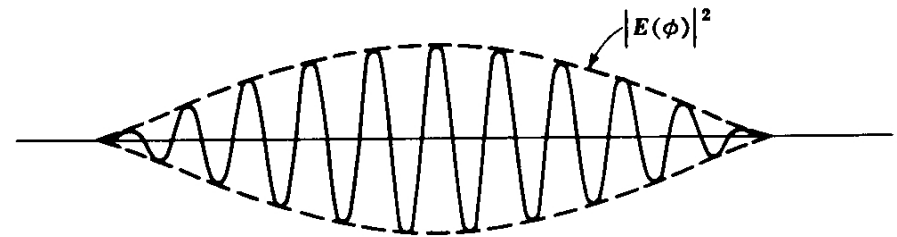


$$\overbrace{|E_1| |E_2| |C|}^{|V|} \cos\left(\frac{bx}{\lambda} + \underbrace{\phi_C}_{\phi_V}\right)$$

(Heterodyne: lectures by F. Gueth and V. Piétu)

# Optic vs Radio Interferometer: I. Measurement Method

	Optic	Radio
Detector { Kind Observable	Quadratic $I =  EE^* $	Linear (Heterodyne) $ E  \exp(i\psi)$
Measure { Method Quantity	Optical fringes $ C  = \frac{I_{\max} - I_{\min}}{I_{\max} + I_{\min}}$	Electronic correlation $ V  \exp(i\phi_V) = \langle E_1 \cdot E_2 \rangle$
Interferometer kind	Additive	Multiplicative

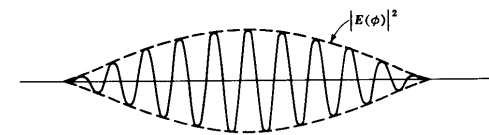


## Multiplicative Interferometer

**Avantage:** all offsets are irrelevant  $\Rightarrow$  Much easier;

**Inconvenient:** Radio interferometer = bandpass instrument;

$\Rightarrow$  Low spatial frequencies are filtered out.

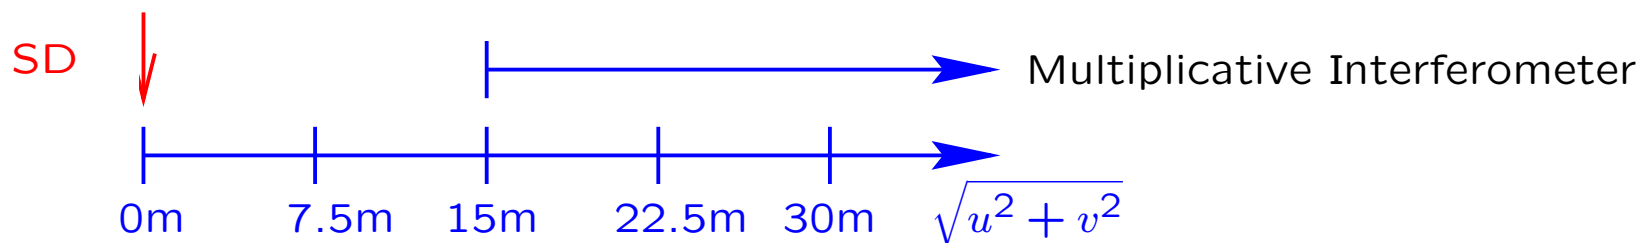

## Optic vs Radio Interferometer: II. Atmospheric Influence

Atmosphere emits and absorbs:

Signal = Transmission \* Source + Atmosphere.

- Optic:  $\left\{ \begin{array}{l} \text{Source} \gg \text{Atmosphere} \\ \text{Transmission} \sim 1 \end{array} \right\} \Rightarrow \text{transparent};$
- Radio:  $\left\{ \begin{array}{l} \text{Source} \ll \text{Atmosphere} \\ \text{Transmission can be small} \end{array} \right\} \Rightarrow \text{fog}.$

Good news: Atmospheric noise uncorrelated

$\Rightarrow$  Correlation suppresses it!

Bad news: Transmission depends on weather and frequency.

$\Rightarrow$  Astronomical sources needed to calibrate the flux scale!

(Lecture by A. Castro-Carrizo)

Atmosphere is turbulent:  $\Rightarrow$  Phase noise (Lecture by M. Bremer).

Timescale of atmospheric phase random changes:

- Optic: 10-100 milli secondes;
- Radio: 10 minutes.



$\Rightarrow$  Radio permits phase calibration on a nearby point source (e.g. quasar).

# Instantaneous Field of View

One pixel detector:

- Single Dish: one image pixel/telescope pointing;
- Interferometer: numerous image pixels/telescope pointing
  - Field of view = Primary beam size;
  - Image resolution = Synthesized beam size.

Wide-field imaging:  $\Rightarrow$  mosaicing (Lecture by F. Gueth).

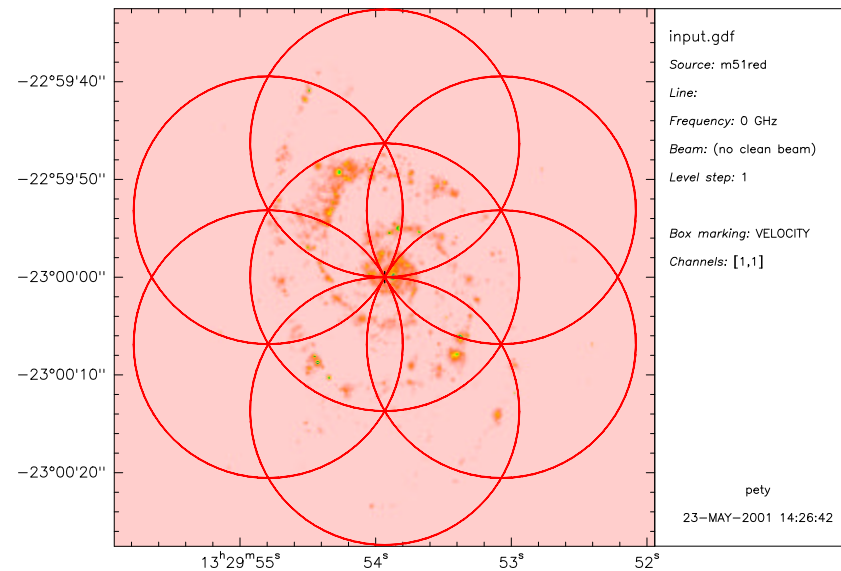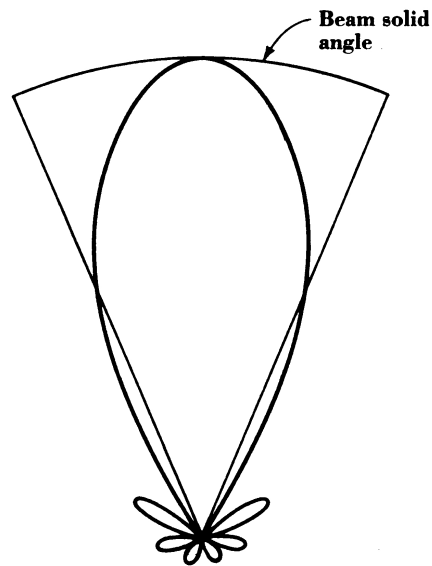

# Conclusion

mm interferometry:

- A bit more of theory;
- Lot's of experimental details (*e.g.* lecture by V. Piétu, and E. Villard).

Why caring about technical details: Some of them must be understood to know whether you can trust your data.

By the end of this week, you should be ready to use PdBI & ALMA!  
(Lectures by J.M. Winters, and G. Dumas)



## Bibliography

- “Synthesis Imaging” . Proceedings of the NRAO School. R. Perley, F. Schwab and A. Bridle, Eds.
- “Proceedings from IMISS2” , A. Dutrey Ed.
- “Interferometry and Synthesis in Radio Astronomy” , R. Thompson, J. Moran and G. W. Swenson, Jr.

## Photographic Credits

- M. Born & E. Wolf, “Principles of Optics” .
- J. W. Goodman, “Statistical Optics” .
- J. D. Kraus, “Radio Astronomy” .

## Lexicon

- Beam: Antenna diffraction pattern.
- Primary Beam: Instantaneous field of view (Single-Dish Beam).
- Synthesized Beam: Image resolution (Interferometer Beam).
- Configuration: Antenna layout of interferometer.
- Baseline: Distance between two antenna.
- $uv$ -plane: Fourier plane.
- Visibilities:  $\sim$  Fourier components of the source.
- Fringe stopping: Temporal variation of delay correction needed to avoid translation of the white fringe.
- Heterodyne: Principle of linear detection.
- Correlator: Where visibilities are measured by correlation of signal coming from pairs of antenna.